


Compatible safety products to protect your head, face, hearing, and vision



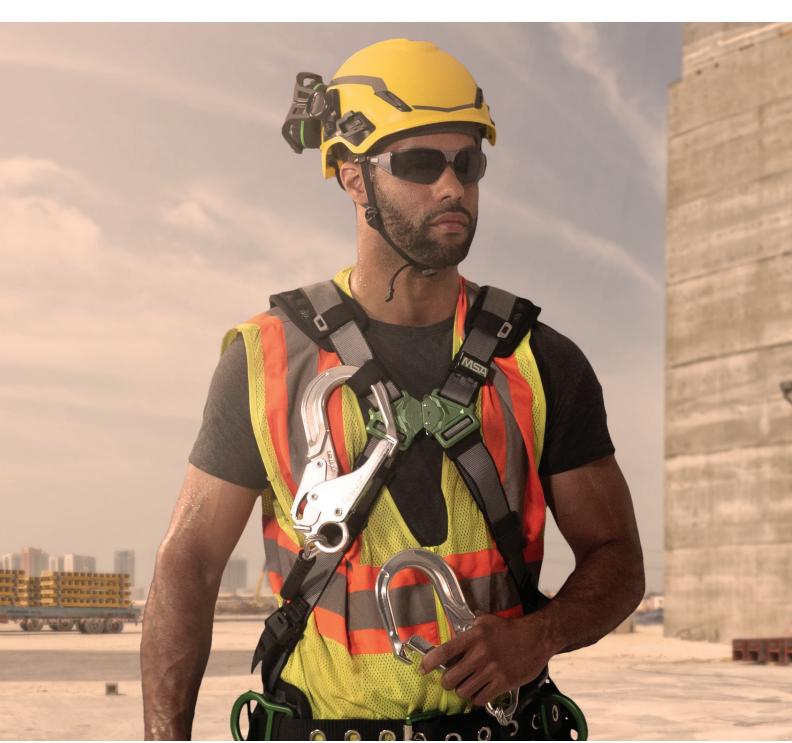

# Join the millions around the globe who choose MSA: For safety. For value.

This catalog highlights MSA's comprehensive head, eye, face and hearing (HEFH) protection line. Our hard hats, eye/face protection products, helmet accessories, hearing protection products—and more—provide seamless safety solutions to protect workers around the world. For a complete product listing, see the most recent MSA Safety Equipment Catalog, call our award-winning customer service department, or visit MSAsafety.com.

#### **V-Gard® Hard Hats**



#### **GLOSS FINISH**

Classification	Туре I	
Application	General purpose	
Shell Material	Polyethylene	
Styles	Slotted cap; slotted full-brim hat	
		Full-Brim Hat: standard (6½ − 8)
Standards	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)	
Certification	Third-party by SEI	
Customization	Imprinting and striping available (see pages 6–7)	
<b>Replacement Suspensi</b>	onsSee page 5	
•		

	-	М	CI	
	П		Э1	

Classification	Type I
Application	General purpose
Shell Material	Polyethylene
Styles	Slotted cap only
Sizes	<b>Cap-Style:</b> standard (6½ – 8)
Standards	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
Certification	Third-party by SEI
Customization	Imprinting and striping available (see pages 6–7)
Replacement Suspensions	See page 5





#### **DID YOU KNOW?**

All V-Gard Helmets have UV inhibitor molded right in.

#### **CUSTOMIZATION:**

Imprinting and striping available—see pages 6–7

**REPLACEMENT SUSPENSIONS:** See page 5



#### **DID YOU KNOW?**

MSA helmets marked LT meet voluntary requirements for "Lower Temperature." Helmets marked LT are conditioned to  $-22^{\circ}F$  and then tested for impact and penetration, as outlined in the Standard. Any helmet NOT marked with LT is tested to  $0^{\circ}F$ .



# **V-Gard Cap-Style Hard Hats**


STANDARD V-GARD SLOTTED CAPS				
Co	olor	w/ Staz-On Suspension	w/ 1 Touch® Suspension <sup>1</sup>	w/ Fas-Trac III Suspension¹
GLOSS FINISH				
WHITE		463942	10057441	475358
BLUE		463943	10057442	475359
YELLOW		463944	10057443	475360
ORANGE		463945	10057444	475361
RED		463947	10057446	475363
GREEN		463946	10057445	475362
GRAY		463948	10057447	475364
HI-VIZ® ORANGE2		488148	10057420	488146
HI-VIZ YELLOW-GREEN <sup>2</sup>		-	10061514	10061512
BRIGHT LIME GREEN		815558	_	815565
DARK (CANADIAN) BLUE		_	_	802972
GOLD		464852	_	475365
ROBIN'S EGG BLUE		463111	_	495853
BROWN		464658	_	495854
SILVER		484340	_	495855
TAN		461180	_	_
BLACK		475235	_	492559
LIGHT BUFF		478237	_	495856
PURPLE		488398	_	495858
PINK		_	_	495862
HOT PINK		10155231	_	10155230

STANDARD V-GARD SLOTTED CAPS			
Color	w/ Fas-Trac III Suspension¹		
MATTE FINISH			
WHITE	10203081		
BLUE	10203082		
YELLOW	10203083		
ORANGE	10203087		
RED	10203086		
GREEN	10203085		
GRAY	10203084		
HI-VIZ® ORANGE2	10203089		
HI-VIZ YELLOW <sup>2</sup>	10203088		
BLACK	10203092		

SMALL V-GARD SLOTTED CAPS				
Colc	w/ Staz-On® Suspension	w/ Fas-Trac® III Suspension¹		
GLOSS FINISH				
WHITE	466354	477477		
BLUE	466355	477478		
YELLOW	466356	477479		
BRIGHT LIME GREEN	_	489368		

LARGE V-GARD SLOTTED CAPS					
Colo	w/ Staz-On Suspension	w/ Fas-Trac III Suspension <sup>1</sup>			
GLOSS FINISH	GLOSS FINISH				
WHITE	473284	477482			
BLUE	476928	477483			
YELLOW	473285	477484			
HI-VIZ® ORANGE2	_	489364			

STANDARD V-GARD CAP SPECIAL ASSEMBLIES				
Color	w/ Staz-On Suspension	w/1Touch Suspension <sup>1</sup>	w/ Fas-Trac III Suspension¹	
GLOSS FINISH				
HI-VIZ ORANGE w/yellow-green stripe <sup>2</sup>	-	10102195	10102193	
HI-VIZ YELLOW-GREEN w/red-orange stripe <sup>2</sup>	-	10102234	10102233	
HI-VIZ YELLOW-GREEN  w/silver stripe <sup>2</sup>	-	10102196	10102194	
<b>WHITE</b> w/lamp bracket and cord holder (Class C)	460018	_	_	
<b>WHITE</b> w/American Flag	474159	_	_	
<b>WHITE</b> w/Swing-Ratchet Suspension	10004689	_	_	



<sup>1</sup>Certified to CSA.

<sup>&</sup>lt;sup>2</sup>V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.

#### **V-Gard Full-Brim Hard Hats**

STANDARD V-GARD FULL-BRIM	I HATS		
Color	w/ Staz-On Suspension	w/ 1 Touch Suspension¹	w/ Fas-Trac III Suspension <sup>1</sup>
GLOSS FINISH			
WHITE	454733	10058321	475369
BLUE	454732	10058320	475368
YELLOW	454730	10058318	475366
ORANGE	454734	10058322	496075
RED	454736	10058324	475371
GREEN	454735	10058323	475370
GRAY	454731	10058319	475367
HI-VIZ® ORANGE2	489360	10058326	10021292
HI-VIZ YELLOW-GREEN <sup>2</sup>	_	10061516	10061515
BRIGHT LIME GREEN	815562	_	815570
DARK (CANADIAN) BLUE	_	_	802975
HOT PINK	10156374	_	10156373

STANDARD V-GARD FULL-BRIM HAT SPECIAL ASSEMBLIES				
Color	w/ Staz-On Suspension	w/ Fas-Trac III Suspension¹		
GLOSS FINISH				
<b>WHITE</b> w/lamp bracket and cord holder (Class C)	460069	815009		

Without

### **V-Gard C1 Full-Brim Hard Hats**

- **ReflectIR™ Thermal Barrier** (patent-pending) works to block the energy of the sun, keeping the inside of the hard hat up to 20°F (11°C) cooler³, reducing the risk of heat stress.
- Largest vents MSA offers on a full-brim hat (vented version) are strategically
  placed to optimize airflow, increase comfort and further reduce heat stress.
- **Premium moisture-wicking sweat band** pulls sweat away from the head allowing it to evaporate into the air, while breathable foam padding keeps you dry and comfortable. Can be easily removed for laundering or replacement.
- Full brim on the V-Gard C1 Hard Hat offers 12% more coverage<sup>4</sup>, providing additional shade while protecting
  you from harmful UV rays. Unique textured brim provides added grip when donning and doffing the hard hat.



V-GARD C1 FULL-BRIM HATS				
Color		Non-Vented	Vented	
TEXTURED BRIM				
WHITE		10215837	10215828	
BLUE		10215839	10215830	
YELLOW		10215841	10215832	
ORANGE		10215843	10215834	
RED		10215838	10215829	
GREEN		10215840	10215831	
GRAY		10215845	10215836	
HI-VIZ® ORANGE2		10215842	10215833	
CUSTOM COLOR		Custom color options available.		

SPECIFICATIONS	Non-Vented	Vented	
STANDARDS COMPLIANCE	ANSI/ISEA Z89.1-2014	(R2019) CSA Z94.1-15	
OPTIONAL REQUIREMENTS (ANSI)		HT High Temp HV (Hi-Viz, as indicated)	
ANSI Z89.1 & CSA Z94.1 CLASSIFICATION	Type 1, Class E	Type 1, Class C	
3RD PARTY CERTIFICATIONS	SEI		
STYLE	Non-Vented Vented		
PRODUCT SIZE	Standard head size 6½-8 (52-64 cm head circumference)		
OTHER PPE	Compatible with all current V-Gard Hard Hat accessories: Fas-Trac III Suspension, frames, visors, hearing protection, chinstraps, sun shades, sun shields, cooling pads, & winter liners		

#### **CUSTOMIZATION:**

Full-color logos available in up to three locations: Front and back; Front, back left, and back right
 Reflective striping available in silver or yellow up to 360° coverage: Front, back, and sides



<sup>1</sup>Certified toCSA

<sup>&</sup>lt;sup>2</sup>V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label. <sup>3</sup>Compared to a hard hat without the ReflectIR Thermal Barrier in sunny conditions; testing done with black, non-vented, V-Gard C1 Hard Hats. <sup>4</sup>Compared to a full-brim V-Gard or V-Gard 500 Hard Hat.



# **Replacement Suspensions for MSA Hard Hats**

# MSA Fas-Trac® III Ratchet Suspension

The MSA Fas-Trac III Suspension helps to reduce pressure headaches and pulled hair, and stays on your head.

- Sweatband fully covers headband and worker's forehead
- Three levels of nape strap adjustment for customized fit
- 3 Lower nape strap improves retention
- 4 Smooth ratchet rotation and secure hold

Learn how the Fas-Trac III Suspension can relieve your headaches. Visit <a href="https://www.MSAsafety.com/fastrac">www.MSAsafety.com/fastrac</a>.



	Suspension Type (4-point, unless otherwise noted)			
	Fas-Trac III	1 Touch	Staz-On	Swing Ratchet <sup>1</sup>
HELMET TYPE (SIZE)	O		The state of the s	
V-GARD CAP OR HAT (STANDARD)	10148708 (m)	10061123 (RVIT)	10087218	816645
V-GARD CAP (SMALL)	10148706	_	467386	_
V-GARD CAP (LARGE)	10148707	_	492566	_
V-GARD 500 CAP (STANDARD)	10148708	10061123	10087218	816645
V-GARD 500 HAT (STANDARD)	10148708	_	10087218	_
SMOOTHDOME CAP (STANDARD)	10148708	10061123	10087218	816645
TOPGARD CAP OR HAT (STANDARD)	10153384 🐨	10061127	_	816648
THERMALGARD CAP (STANDARD)	10153384 TRITI	10061127	_	_
SKULLGARD CAP OR HAT (STANDARD)	10153385	10061128	454231	816654
SKULLGARD CAP (LARGE)	10126693	_	468096	_
SUPER-V CAP (STANDARD)	10126683	_	_	_
VANGUARD CAP (STANDARD)	10153386	_	_	_
COMFO-CAP (STANDARD)	10153385	10061128	454231	_

<sup>1</sup>Swing ratchet size is 6½ through 7½

The **Fas-Trac III Suspension sweatband** accessory keeps workers cool and dry.

#### i dit ito

TRY IT!

#### Product Specifi



- $\bullet \hbox{Optional, moisture-wicking and was hable }$
- •Can be attached/replaced while suspension is assembled in helmet
- Sold ONLY in packages of 10

#### **A WARNING**

Use only the indicated MSA suspension in your MSA helmet. Do not mix suspension sizes and helmet sizes (i.e., putting a standard sized suspension in a large helmet or any other mismatched combination). Do not use competitor suspensions in MSA helmets. Inspect your suspension frequently. Suspensions should be replaced every 12 months, regardless of inspection results. Replace immediately (along with the helmet), if an impact has occurred. Failure to follow these instructions will reduce the energy absorbing ability of the protective helmet to receive impact, and could result in serious injury or death.



#### **DID YOU KNOW?**

**NFPA 70E** is a work practice; it is not a standard and does not specify any test methods. No products "meet" NFPA 70E—users simply follow the practice of NFPA 70E. For head protection, NFPA 70E recommends that users wear Class E hard hats in following this work practice.

#### **Helmet Customization For 30+ Years**



# Practice makes perfect logos

- MSA uses inks and processes that create durable logos.
   We have never had a complaint about a logo "scratching off" in the 30+ years we have been in the logo business!
- It can be tricky to avoid logo distortion due to the curvature
  of the hard hat. That's why MSA Logo Express® Service employs
  graphic designers who process logos onto hard hats. These skilled
  artisans ensure each logo is placed properly so it not only endures,
  but also accurately represents your brand and logo in color, size and
  shape-despite the curve of the hard hat.
- MSA offers multiple printing services from simple one-color logo to digital photos, in up to four locations
- We don't require "color-separated" artwork for 1+ color logos; nor do
  we require customers to identify the PMS colors in their logos. Our
  graphic artists can manage that, if you do not have these details.
- Re-ordering is easy because we keep your logo on file until you change it<sup>1</sup>.



# Our Process

Once your order has been received by the MSA Logo Express Service Design center we get to work. Files are imported from your on-line hard hat configuration, assessed for usability and colors separated (if the PMS colors have not been identified) and layout finalized. Should you choose to personalize your hard hat, don't forget to complete form ID# 0617-17 and submit with your order.



# Delivery

Once the layout process is complete, our factory craftsman get to work on your order. Your order for a new hard hat logo should ship within eight (8) days from our Murrysville, PA plant from the date we receive your approval on the artwork<sup>2</sup>.



# Minimum Order Quantities (MOQ)

MSA requires MOQs, by hard hat type, for logoing and striping. Qualifying MOQs of custom-imprinted or striped hard hats must be of the same size, model and options (i.e., color and suspension). MOQs are:

- 20 for V-Gard, SmoothDome®, Topgard, Comfo Cap Hard Hats, and Nexus Climbing Helmets
- 16 for Skullgard or Thermalgard® Hard Hats
- 12 for Super-V and Vanguard Hard Hats
- 40 for Bump Caps



# Pricing

Please refer to your local distributor for pricing details on standard and non-standard charges that may apply to your order.



### Striping

Add any of 27+ different reflective and retro-reflective stripes to your hard hat. MSA reflective stripes help enhance the visibility of workers in daytime conditions, while retro-reflective stripes<sup>3</sup> offer additional enhancement in nighttime or low-light conditions. Stripes are available in various sizes and shapes, and can be placed on all types of MSA hard hats.

Keep in mind too, that while you can order more stripes for self-application, MSA does not recommend doing this. The reason for this is MSA pre-treats all hard hats prior to striping with an electrical discharge treatment to enhance the ability of the stripes adhesive bonds.



# Stock Logos and Slogans

With 23 "pre-built" stock logos and slogans, MSA offers more "off-the-shelf" hard hat graphics than anyone in the industry. Standard logos make it easy for you to place emphasis on safety, patriotism or personnel identification without having to develop your own artwork. They can be can be used alone or with your customized logo and striping.



### Hard Hat Color Choices

MSA offers more stocked color options than competitors—in our popular V-Gard hard hat, we offer 21 stocked colors. There are non-stocked color options available for all MSA hard hats; a qualifying MOQ of 100 hard hats is required.

You can create a shell color of your choice. You need only order a qualifying MOQ of 500 hard hats or more.



# Personalization

The same quality and precision that MSA logos have become famous for is available with personalization. You can add your name, ID#, title, or anything else with this additional option.

<sup>&</sup>lt;sup>1</sup> Files are purged from MSA's system if no logoed hard hat order is received within three (3) years of the first order.

<sup>&</sup>lt;sup>2</sup> Orders for repeat logos ship within seven (7) days. This includes 2-3 days for order processing, and 5 days for production.



# **Placing Customized Hard Hat Orders**

Steps to complete your online logo configuration order:

# Summary of how to submit artwork to MSA Logo Express Service

Please review the document for process details.

**ARTWORK** 

METHOD FOR Electronic file emailed to your **SUBMITTING** MSA distributor

SUBMITTING **ARTWORK** 

**PROGRAMS** Corel Draw (version x6 or lower) **FOR** Adobe Illustrator (version cs6 or lower) Adobe Photoshop (version cs6 or lower)

**ARTWORK VECTOR FILES:** 

FILES .cdr (Corel Draw) .ai (Adobe Illustrator) .eps (encapsulated postscript)

FONT **REQUIREMENTS** 

- Convert all fonts to "outlines" (Adobe Illustrator) or "curves" (Corel Draw).
- Provide a list of actual fonts used with artwork file. Font type must be truetype and/or postscript type 1.

### Did you know?

If you **only** have other types of artwork, (e.g. printed copies of letterhead or business cards), please contact MSA Logo Express Service for submission instructions.

If you are personalizing your hard hat, please fill out form ID #0617-17-MC.

### **Submitting Artwork**

- 1. Send the artwork by email to the MSA distributor taking your order. They will send it to MSA Logo Express Service.
- 2. Name the Pantone Matching System (PMS) ink colors used in your artwork (if you know them). Type the actualnumbers in the email, as colors sometimes don't transmit properly through email. For example, MSA's logo is green, but specifically, the color of our brand logo is PMS 355.
- **3.** Provide all linked graphics and fonts (see "Font Submission")

Note: Should you not have access to email please contact MSA Logo Express for alternate methods.

#### Personalization

Add your name, ID#, title or anything else with this option. Fill out form ID# 0617-17-MC and submit with order. ONLY AVAILABLE FOR V-GARD LINE OF MSA HARD HATS.

#### **Font Submission**

Failure to specify or provide files for the typefaces used in your artwork is the most common source of delays and logo errors. If your artwork includes text, please be sure to:

- Convert type to outlines:
  - Adobe Illustrator (Type > Create Outlines)
  - Corel Draw (Convert to Curves using Ctrl+Q or Command+Q)
- Submit a list of all fonts used, along with the actual font files. All fonts should be TrueType and/or Postscript Type 1 formats.

NOTE: Do not use Helvetica Narrow; it is unreliable and could complicate the printing process.



# The "Try-It" Sample Program

The "Try It" sample program offers some of the most popular MSA head, eye, face and hearing protection products, including V-Gard Helmets, V-Gard Accessories, left/RIGHT Hearing Protection, and Sightgard® Eyewear —completely FREE of charge! Look for the (min) that tells you which products are included in the program.



See what a logoed V-Gard Cap, Hat or 500 Helmet looks like. Pre-designed logoed hard hat samples are available through the FREE sample Try It program. Contact your MSA sales representative for more details.

**Questions About Helmet Customization?** 

Contact your MSA distributor or MSA Logo Express Service.

EMAIL: Logo.Express@msasafety.com

PHONE: 1-800-MSA-LOGO

(1-800-672-5646)

**ADDRESS:** MSA Logo Express

3880 Meadowbrook Rd. Murrysville, PA 15668-1753

Visit us on the web:

us.msasafety.com/logoexpress

**KEYWORD: Logo** 

# Freedom Series™ and Specialty V-Gard Hard Hats

Classification	Type I	Suspension	Fas-Trac III
Application	General purpose	Sizes	Standard (6½ – 8)
Shell Material	Polyethylene with thermoformed graphics	Standards	ANSI/ISEA Z89.1-2014 (Class E);
Styles	Slotted cap;		CSA Z94.1-2015 (Class E)
	Slotted full-brim hat (Freedom Series only)	Certification	Third-party by SEI

#### **AMERICAN FREEDOM SERIES ASSEMBLIES**



American Stars and Stripes V-Gard Slotted Cap Part No. 10052945



American Stars and Stripes V-Gard Slotted Hat Part No. 10071157



American Flag w/2 Eagles V-Gard Slotted Cap Part No. 10052947



American Flag w/2 Eagles V-Gard Slotted Hat Part No. 10071159



**Camouflage** V-Gard Slotted Cap Part No. 10103908



**Camouflage** *V-Gard Slotted Hat*Part No. **10104254** 



**American Eagle** *V-Gard Slotted Cap*Part No. **10079479** 



**Dual American Flag** *V-Gard Slotted Cap*Part No. **10050611** 

#### **CANADIAN FREEDOM SERIES ASSEMBLIES**



White w/Red Maple Leaf V-Gard Slotted Cap Part No. 10050613



White w/Red Maple Leaf V-Gard Slotted Hat Part No. 10082234



Black w/Red Maple Leaf V-Gard Slotted Cap Part No. 10082233



Black w/Red Maple Leaf V-Gard Slotted Hat Part No. 10082235

### Part No. **10104925**

Camouflage w/Canadian Flag on front<sup>1</sup> V-Gard Slotted Cap



**SPECIALTY V-GARD ASSEMBLIES** 

**Rally Cap** *V-Gard Slotted Cap*Part No. **10101535** 



Metallic Gold V-Gard Slotted Cap Part No. 10101854



**Black Fire** V-Gard Slotted Cap Part No. **10092015** 

**CUSTOMIZATION:** Imprinting and striping available—see pages 6–7

**REPLACEMENT SUSPENSIONS:** See page 5

<sup>1</sup>Not pictured

<sup>2</sup>Extreme Hi-Viz Cap meets high-visibility requirements of ANSI/ISEA 107.




# **Hydro Dip V-Gard Hard Hats**

Classification	Type I	Sizes	Standard (6½ – 8)
Application	General purpose	Standards	ANSI/ISEA Z89.1-2014 (Class E);
Shell Material	Polyethylene		CSA Z94.1-2015 (Class E)
Styles	Slotted cap; Slotted full-brim hat	Certification	Third-party by SEI
Suspension	Fas-Trac III		

# The #1 Selling Hard Hat Has a New Look!

The features that have set the MSA V-Gard as a world leader in head protection remain: comfort, durability, customization, and support. The hydro dip finish provides a new twist on style, without sacrificing safety or performance. Choose from eight different standard looks, with the ability to customize to your specific design.\* All V-Gard hydro dip hard hats come with the first-in-class comfort of the Fas-Trac® III Suspension and are products of the U.S.

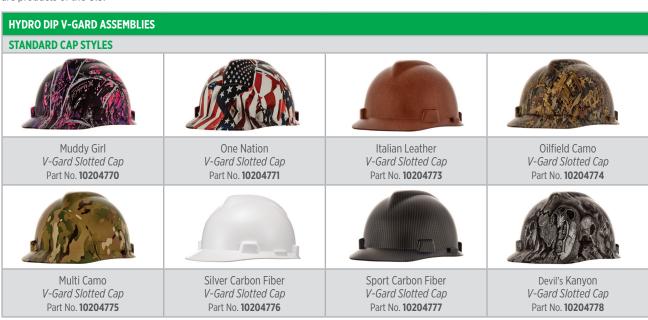



**CUSTOMIZATION:** Imprinting and striping available—pages 6–7

**REPLACEMENT SUSPENSIONS:** See page 5

#### V-Gard 500 Hard Hats

**Vented V-Gard 500 Caps and Hats** provide cooling vents for improved air circulation and comfort; **Non-Vented V-Gard 500 Caps and Hats** provide dielectric head protection.

Classification	
Application	General purpose
Shell Material	Polyethylene
Styles	Vented or non-vented slotted cap; Vented or non-vented hat
Sizes	Standard (6½ – 8)
Standards	
	CSA Z94.1-2015 (Vented Class C; Non-Vented Class E)
Certification	Third-party by SEI



Color	w/4-Point Fas-Trac III Suspension	w/6-Point Fas-Trac III Suspension
VENTED CAP		
WHITE	10034018	10034027 (m/m)
BLUE	10034019	10034028 (19717)
YELLOW	10034020	10034029 (11)
RED	10034022	10034031 (11)
GREEN	10034023	10034032 (11)
HI-VIZ ORANGE <sup>1</sup>	10034026	10034035 (พากา
HI-VIZ YELLOW-GREEN <sup>1</sup>	10074819	10074820 (11)
NON-VENTED CAP		
WHITE	10034088	10034097

Colc	or	w/4-Point Fas-Trac III Suspension	w/6-Point Fas-Trac III Suspension
VENTED FULL-BRIM HAT	•		
WHITE		10167911	10167950 mm
BLUE		10167912	10167951 (m/m)
YELLOW		10167913	10167952 mm
RED		10167915	10168437 (781 171
GREEN		10167916	10168438 (77)
HI-VIZ ORANGE <sup>1</sup>		10167921	10168453 (m) III
HI-VIZ YELLOW-GREEN <sup>1</sup>		10167931	10168461 (71)
NON-VENTED FULL-BRIM HAT			
WHITE		10168521	10168589

**CUSTOMIZATION:** Imprinting and striping available—pages 6–7

**REPLACEMENT SUSPENSIONS:** See page 5

# **Topgard® Hard Hats**

Classification	Type I
Application	General purpose; elevated temperature <sup>2</sup>
Shell Material	Polycarbonate
Styles	Slotted cap; Non-slotted full-brim hat
Sizes	Standard (6½ – 8)
Standards	ANSI/ISEA Z89.1-2014 (Class E)
	CSA Z94.1-2015 (Class E)
Certification	Third-party by SEI



Color	w/ 1 Touch Suspension	w/ Fas-Trac III Suspension
TOPGARD SLOTTED CAP (STANDARD SIZE)		
WHITE	454728	475385 TRY IT
YELLOW	454721	475378 TRY IT
GRAY	454722	475379
BLUE	454723	475380 (TRY IT)
ORANGE	454725	475382
GREEN	454726	475383
RED	454727	475384 TRY ITI
BRIGHT ORANGE	_	804396
WHITE W/LAMP BRACKET & CORD HOLDER		_

Color	w/ 1 Touch Suspension	w/ Fas-Trac III Suspension
TOPGARD SLOTTED H	IAT (STANDARD SIZ	E)
WHITE	454719	475393 (TRY IT)
YELLOW	454712	475387 (TRY IT)
GRAY	454713	_
BRIGHT ORANGE	-	804397

**CUSTOMIZATION:** Imprinting and striping available—pages 6–7

**REPLACEMENT SUSPENSIONS:** See page 5

3.6°F) and then tested per the ANSI/ISEA Z89.1 Industrial Head Protection Standard for top force transmission. In addition, Topgard Helmets were exposed to a radiant heat load until the surface temperature on the top of the helmet reaches 275°F and then tested per the ANSI/ISEA Z89.1 Industrial Head Protection Standard for top force transmission. The source of the radiant heat load was located above the top of the helmet. This testing is performed by MSA and is not part of the helmet certification process.

<sup>&</sup>lt;sup>1</sup>V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.

<sup>2</sup>Helmets marked with the HT designation have been certified to the optional Higher Temperature test of ANSI/ISEA Z89.1. In this test, helmets are pre-conditioned in an oven at 60°C ± 2°C (140°F ± 36°F) and then tested per the ANSI/ISEA Z89.1 Industrial Head Protection Standard for too force transmission. In addition, Topgard Helmets were exposed to a radiant heat load until the surface.



#### **SmoothDome® Hard Hats**

Classification.....Type I Application...... General purpose; welding

Shell Material ...... Polyethylene

**Styles**......Vented or non-vented slotted cap

**Certification**......Third-party by SEI



Color	w/4-Point Fas-Trac III Suspension	w/6-Point Fas-Trac III Suspension
SMOOTHDOME CAP (STANDARD SIZE)		
WHITE	10074067	10084078
BLUE	10074068	10084079
YELLOW	10074069	10084080
ORANGE	10074070	10084081
RED	10074071	10084082
GREEN	10074072	10084083
GRAY	10074073	10084084
HI-VIZ ORANGE <sup>1</sup>	10074077	10084088
HI-VIZ YELLOW-GREEN <sup>1</sup>	10074084	10084095
HI-VIZ ORANGE w/yellow-green stripe <sup>1</sup>	10095987	10095988
HI-VIZ YELLOW-GREEN w/orange stripe <sup>1</sup>	10095989	10095990
HI-VIZ ORANGE w/silver stripe¹	10096141	_
HI-VIZ YELLOW-GREEN w/silver stripe <sup>1</sup>	10096142	_

**CUSTOMIZATION:** Imprinting and striping available—pages 6–7

**REPLACEMENT SUSPENSIONS:** See page 5

# Thermalgard® Hard Hats

Classification.....Type I **Application**......General purpose; elevated temperature<sup>2</sup> Shell Material ...... Glass-reinforced nylon Styles ...... Slotted cap **Sizes** Standard (6½ − 8) Certification...... Third-party by SEI



Color	w/ 1 Touch Suspension	w/ Fas-Trac III Suspension
THERMALGARD CAPS (STANDARD SIZE)		
YELLOW	486964	486959
WHITE	486965	486960
RED	-	486961
ORANGE	486967	486962
BLUE	486968	486963
BRIGHT ORANGE	800359	800360
GREEN	487399	814343
STEEL GRAY	_	10095325

**CUSTOMIZATION:** Imprinting and striping available—pages 6–7 **REPLACEMENT SUSPENSIONS:** See page 5

V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label. <sup>2</sup>Helmets marked with the HT designation have been certified to the optional Higher Temperature test of ANSI/ISEA Z89.1. In this test, helmets are pre-conditioned in an oven at 60°C ± 2°C (140°F ± 3.6°F) and then tested per the ANSI/ISEA Z89.1 Industrial Head Protection Standard for top force transmission. In addition, Thermalgard Helmets were exposed to a radiant heat load until the surface temperature on the top of the helmet reaches 350°F and then tested per the ANSI/ISEA Z89.1 Industrial Head Protection Standard for top force transmission. The source of the radiant heat load was located above the top of the helmet. This testing is performed by MSA and is not part of the helmet certification process.

# **Skullgard® Hard Hats**

Classification	Type I
Application	General purpose; elevated temperature <sup>1</sup>
Shell Material	Phenolic
Styles	Non-slotted cap; full-brim hat
Sizes	
	<b>Hat:</b> Standard (6½ − 8)
Standards	ANSI/ISEA Z89.1-2014 (Class G)
Certification	Third-party by SEI



Color	w/ Staz-On Suspension	w/ Fas-Trac III Suspension	w/ Swing-Ratchet Suspension
SKULLGARD CAP (STAND	ARD SIZE)		
NATURAL TAN	454617	475395	816651
WHITE	454618	475396	_
YELLOW	454619	475397	_
RED	454620	_	_
GREEN	454621	_	_
GRAY	454622	_	_
BLUE	454623	_	_
ORANGE	454626	_	_
HI-VIZ RED-ORANGE <sup>2</sup>	458702	_	_
SKULLGARD HAT (STAND	ARD SIZE)		
NATURAL TAN	454664	475407	_
WHITE	454665	475408	_
YELLOW	454666	_	_
GREEN	454668	_	_
ORANGE	454673	_	_

	w/ Staz-On Suspension	w/ Fas-Trac III Suspension	
<b>ALTERNATIVE SK</b>	ULLGARD ASS	SEMBLIES	
SKULLGARD	82018	475405	Large size, natural tan
CAP 📜	-	10104377	Small size, natural tan
100 miles	460409	_	Standard size, with lamp bracket and cord holder, natural tan <sup>3</sup>
	-	482002	With welder's lugs, natural tan <sup>3</sup>
SKULLGARD HAT	460389	_	Standard size, with lamp bracket and cord holder, natural tan <sup>3</sup>

# CUSTOMIZATION: Imprinting and striping available—pages 6–7 REPLACEMENT SUSPENSIONS: See page 5

# **Super V® Hard Hats**

Classification	Type II (ANSI and CSA)
Application	Lateral protection
Shell Material	Polyethylene
Styles	Slotted cap w/foam liner
Sizes	Standard (6½ – 7¾)
Standards	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
Certification	Third-party by SEI



Color	w/Fas-Trac III Suspension
SUPER V ASSEMBLIES	
WHITE	C217091 (RY IT)
YELLOW	C217093 (mr)n
RED	C217095
ORANGE	C217094
BLUE	C217092
NAVY GRAY	C217097
HI-VIZ ORANGE <sup>2</sup>	C217100

Col	lor	w/Fas-Trac III Suspension
SUPER V ASSEMBLIES		
GREEN		C217096
GOLD		C217098
BLACK		C217140
SILVER		10025227
<b>A</b> 1	VΑ	RNING

Use only MSA's Fas-Trac III Suspension designed for Super-V Helmets. Use of any other suspension will reduce the energy-absorbing ability of the protective helmet, which can result in serious personal injury or death.

**CUSTOMIZATION:** Imprinting and striping available—pages 6–7 **REPLACEMENT SUSPENSIONS:** See page 5

<sup>&#</sup>x27;Helmets marked with the HT designation have been certified to the optional Higher Temperature test of ANSI/ISEA Z89.1. In this test, helmets are pre-conditioned in an oven at 60°C ± 2°C (140°F ± 3.6°F) and then tested per the ANSI/ISEA Z89.1 Industrial Head Protection Standard for top force transmission. In addition, Skullgard Helmets were exposed to a radiant heat load until the surface temperature on the top of the helmet reaches 350°F and then tested per the ANSI/ISEA Z89.1 Industrial Head Protection Standard for top force transmission. The source of the radiant heat load was located above the top of the helmet. This testing is performed by MSA and is not part of the helmet certification process.

<sup>&</sup>lt;sup>2</sup>Hi-Viz red-orange Skullgard Cap meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.

<sup>3</sup>Alternative Skullgard Assemblies that include welder's lugs or lamp bracket and cord holder are certified to Class C electrical rating.



### **V-Gard H1 Safety Helmets**

The V-Gard H1 Safety Helmet and accessories provide exceptional comfort and ease of use in a stylish low-profile design. A complete above-the-neck platform for all applications.

- Fas-Trac® III Pivot ratchet suspension for **superior comfort**, adjustability and range of motion
- Non-contact foam liner maximizes air flow & breathability for optimal cooling and hygiene
- Vented options for optimal air flow and cooling
- Field replaceable 4-point chinstrap with multiple adjustment points for **customized fit and comfort**
- Premium sweatband with sweat-wicking fabric, breathable foam and Velcro® attachment for easy field replacement
- Patented "push-button" accessory attachment rail and universal lighting clips for **quick installation and removal**
- Convenient rescue whistle integrated into the chin strap buckle



#### **CUSTOMIZATION:** Stylish dark gray reflective striping standard. Imprinting available—see pages 6-7 **ACCESSORIES:** See page 14

	NOVENT w/ pivoting Fas-Trac III Suspension	TRIVENT w/ pivoting Fas-Trac III Suspension	BIVENT w/ pivoting Fas-Trac III Suspension	NOVENT w/ pivoting Fas-Trac III Suspension	BIVENT w/ pivoting Fas-Trac III Suspension
CERTIFICATIONS	A	NSI, EUROPE & ARGENTIN	A	ANSI & (	CANADA
ANSI Z89.1	•			•	
EN397	•				
EN12492					
CSA Z94.1					
IRAM					
V-GARD H1 SAFETY HELMET A	SSEMBLIES				
WHITE	10194791	10194783	10212394	10219932	10219941
RED	10194792	10194784	10212395	10219933	10219942
BLUE	10194793	10194785	10212396	10219934	10219943
GREEN	10194794	10194786	10212397	10219935	10219944
YELLOW	10194795	10194787	10212398	10219936	10219945
HI-VIZ YELLOW GREEN	10194796	10194788	10212399	10219937	10219946
ORANGE	10194797	10194789	10212400	10219938	10219947
BLACK	10194798	10194790	10212401	10219939	10219948
GRAY	10204347	10204346	10212402	10219940	10219949

V-GARD I	H1 SAFETY HE	LMET ACC	ESSORIES		
Part No.	Product Name	Color	Product Specifics	Approvals	
10194818	V-Gard H1 Clear Face Shield	Clear	Clear polycarbonate contoured visor for closer fit and optimal resistance to impact and splash hazards Simple push button donning and doffing on the V-Gard HI Safety Helmet—no additional frames or adapters required Dual pivot hinge maintains a low profile to the helmet when stowed for improved balance and wind resistance Frameless design with anti-fog and anti-scratch coatings for greater visibility	• ANSI/ISEA Z87.1-2015 • CSA Z94.3 • EN 166	
10194819	V-Gard H1 Mesh/ Forestry Face Shield	Mesh	Steel mesh contoured visor for closer fit and optimal protection from flying chips and other light debris     Simple push button donning and doffing on the V-Gard HI Safety Helmet—no additional frames or adapters required     Dual pivot hinge maintains a low profile to the helmet when stowed for improved balance and wind resistance	• ANSI/ISEA Z87.1-2015 • EN 1731	
10194820	V-Gard H1 Half-Face Spectacles	Clear	Clear polycarbonate contoured spectacles for closer fit and optimal resistance to impact and splash hazards Simple push button donning and doffing on the V-Gard HI Safety helmet—no additional frames or adapters required Dual pivot hinge maintains a low profile to the helmet when stowed for improved balance and wind resistance Frameless design with anti-fog and anti-scratch coatings for greater visibility	• ANSI/ISEA Z87.1-2015 • CSA Z94.3 • EN 166	
10217333	V-Gard H1 Shaded Half-Face Spectacles	Shaded	Smoke-shaded polycarbonate contoured spectacles for closer fit and improved resistance to impact and splash hazards Simple push button donning and doffing on the V-Gard H1 Safety Helmet—no additional frames or adapters required Dual pivot hinge maintains a low profile to the helmet when stowed for improved field of vision and wind resistance Frameless design with anti-fog & anti-scratch coatings improve visibility	• ANSI/ISEA Z87.1-2020 • CSA Z94.3 • EN 166	
10220915	V-Gard H1 FR (Flame- Retardant) Chinstrap		For use with the V-Gard HI Novent Safety Helmet  4-point FR chinstrap with multiple adjustment points for customized fit and comfort  • Made from flame resistent Kevlar® fabric  • Convenient rescue whistle integrated into the color-coded chinstrap buckle	• NFPA 1971, Sections 7.4.10 (ASTM D6413/ D6413M) and 7.4.11 (ASTM F2894/ F2894M)	

Part No.	V-Gard H1 Replacemenet Parts
10194760	V-Gard H1 Replacement Suspension Assembly, Fas-Trac III Pivot
10194761	V-Gard H1 Replacement Sweatband, Fas-Trac III Pivot, 3-pack
10194765	V-Gard H1 Replacement Chin Strap, Trivent
10194766	V-Gard H1 Replacement Chin Strap, Novent/Bivent



# **Comfo-Cap® Hard Hats**

Classification......Type I
Application.....Mining

Shell Material ...... Polycarbonate

**Styles** ...... Non-slotted cap w/ lamp bracket & cord holder

**Sizes** ...... Standard (6½ − 8)

**Standards**...... ANSI/ISEA Z89.1-2014 (Class G)

Certification.....Third-party by SEI



CUSTOMIZATION:
Imprinting and striping available—pages 6–7
REPLACEMENT SUSPENSIONS: See page 5

Color	w/ Staz-On Suspension	w/ Fas-Trac III Suspension
COMFO CAP ASSEMBLIES		
WHITE	91522	475336
BLUE	91586	_
YELLOW	91585	_
ORANGE	91589	_
RED	91590	_
GREEN	91584	_
BLACK	82769	_

# **Bump Caps**

Classification	Non
Application	
Shell Material	Polyethylene
Styles	Non-slotted cap w/ plastic suspension
Sizes	Standard (6½ – 8)
Standards	Not applicable
Certification	None



10033652
10033650
10033651
10033654
10033653
10033655

# WARNING mp caps are not safety helmets and do not meet OSHA or

Bump caps are not safety helmets and do not meet OSHA or ANSI/ISEA Z89.1 requirements. DO NOT use bumps caps for impact protection, for sports or when an ANSI-compliant helmet is required.

#### **CUSTOMIZATION:**

Imprinting and striping available (locations limited)

# V-Gard Accessory System: V-Gard Frames for Cap-Style Hard Hats

Part No.	Debris Control	F	Product Specifics
0187161	With debris control	Easy to Use     Add and remove accessories¹     Quicker visor installation and removal     Green color coded parts	Reducing Complexity • Designed to work with all MSA V-Gard cap-style hard hats
		Built to Last • Infinity joints • Universal strap • Debris control	
10187162	Without debris control	Add and remove accessories     Quicker visor installation and removal     Green color coded parts	Reducing Complexity • Designed to work with all MSA V-Gard cap-style hard hats
		Built to Last • Infinity joints • Universal strap	

Part No.	Product Specifics
10187163	Replacement debris wiper

Part No.	Product Specifics	
10187251	Replacement rubber strap	

#### **V-GARD FRAMES FOR GENERAL PURPOSES**

**Markets:** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining

**Applications:** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing

Standards<sup>2</sup>: ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; AS/NZS 1337 Certification: Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.

Min Order Qty: 10

Part No.	Material	Debris Control	Product Specifics	
10115730	High density polyethylene (HDPE)	Includes replaceable debris control which creates tight seal between frame and cap	<ul> <li>Fits all MSA Slotted Caps</li> <li>Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs<sup>3</sup></li> <li>Sliding adjustment bladesallow visor to work with most half-mask respirators and other PPE worn under a visor</li> </ul>	integral (in the content of the cont
10121266	High density polyethylene (HDPE)	Debris control sold separately	<ul> <li>Fits all MSA Slotted Caps<sup>4</sup></li> <li>Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs<sup>3</sup></li> <li>Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor</li> </ul>	NO.

#### **AWARNING**

Use V-Gard Frames ONLY with V-Gard Visors, to ensure compliance with safety standards. Misuse can result in death, permanent impairment of sight, or other serious injury.

<sup>1</sup>MSA does not recommend the use of the V-Gard Universal Frame with the MSA SmoothDome when using cap-mounted muffs and large V-Gard molded Visors. The V-Gard Frame for Slotted Caps should be worn with this particular combination.

<sup>&</sup>lt;sup>2</sup>Standards requirements met by each V-Gard Frame/V-Gard Visor combination designated on each V-Gard Visor.

<sup>&</sup>lt;sup>3</sup>Patent pending

<sup>4</sup>MSA recommends the use of debris control on V-Gard frames when wearing BOTH large V-Gard molded Visors and cap-mounted earmuffs.



# V-Gard Accessory System: V-Gard Frames for Cap-Style Hard Hats

#### V-GARD FRAMES FOR ELEVATED TEMPERATURE APPLICATIONS

**Markets:** Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, and steam tunnels

**Applications:** Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding

**Features:** Tested to withstand temperatures of 350°F (176.7°C), reducing warping, cracking or crazing

Standards': ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; AS/NZS 1337 Certification: Third-party by Intertek. INSPEC International Ltd..

CSA International and SAI Global Ltd.

Min Order Qty: 10

Part No.	Material	Debris Control	Product Specifics	
10115821	Polycarbonate — all non-metal construction	Replaceable debris control tested against EN 166 hot solids requirements	Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs <sup>2</sup> Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor	
10121267	Polycarbonate — all non-metal construction	Debris control sold separately <sup>3</sup>	Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor	
10116552	Polycarbonate — all non-metal construction	Replaceable debris control tested against EN 166 hot solids requirements	Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models <sup>4</sup> Design allows use with other PPE, including MSA earmuffs and respirators	

# V-Gard Accessory System: V-Gard Frames for Full-Brim Hard Hats

### **V-GARD FRAMES FOR GENERAL PURPOSES**

**Markets:** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining

**Applications:** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing

Standards': ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; AS/NZS 1337 Certification: Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.

Min Order Qty: 10

Part No.	Material	Debris Control	Product Specifics	
10116627	High density polyethylene (HDPE)	Offered without debris control ONLY	Heavy duty flat rubber strap allows easy and secure placement on all MSA hats, including non-slotted models     Design allows use with other PPE, including MSA earmuffs and respirators     Fits MSA Full-Brim Safety Helmets	

#### V-GARD FRAMES FOR ELEVATED TEMPERATURE APPLICATIONS

**Markets:** Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, and steam tunnels

**Applications:** Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding

**Features:** Tested to withstand temperatures of 350°F (176.7°C), reducing warping, cracking or crazing

**Standards':** ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; and AS/NZS 1337 **Certification:** Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.

Min Order Oty: 10

	J, J		Tim order aty. 10	
Part No.	Material	Debris Control	Product Specifics	
10116628	Polycarbonate — all non-metal construction	Offered without debris control ONLY	Heavy duty flat rubber strap allows easy and secure placement on all MSA hats, including non-slotted models     Design allows use with other PPE, including MSA earmuffs and respirators     Fits MSA Full-Brim Safety Helmets	

<sup>&</sup>lt;sup>1</sup>Standards requirements met by each V-Gard Frame/V-Gard Visor combination designated on each V-Gard Visor.
<sup>2</sup>Datast neuding

<sup>3</sup>MSA recommends the use of debris control on V-Gard frames when wearing BOTH large V-Gard molded Visors and cap-mounted earmuffs.

<sup>&</sup>lt;sup>4</sup>MSA does not recommend the use of the V-Gard Universal Frame with the MSA SmoothDome when using cap-mounted muffs and large V-Gard molded Visors. The V-Gard Frame for Slotted Caps should be worn with this particular combination.

# V-Gard Accessory System: V-Gard Frames for MSA Slotted Full-Brim Hard Hats

#### **V-GARD FRAMES FOR GENERAL PURPOSES**

**Markets:** Oil, gas & petrochemical, manufacturing, repair and maintenance, construction, general industry, forestry, shipbuilding, metalworking, automotive, mining

**Applications:** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing

**Standards¹:** ANSI/ISEA Z87.1-2015 and CSA Z94.3 **Certification/Testing:** CSA International and Intertek

Min Order Qty: 10

	_			
Part No.	Material	Debris Control	Product Specifics	
10154622	Polybutylene terephthalate (PBT)	Sold with replaceable debris control which creates tight seal between frame and hat	Fits MSA Slotted Full Brim Hats     Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor     Patented Infini-just allows lift/closure adjustment using grippable knobs that can't be lost <sup>2</sup>	
10154604	Polybutylene terephthalate (PBT)	Debris control sold separately	Fits MSA Slotted Full Brim Hats     Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor     Patented Infini-just allows lift/closure adjustment using grippable knobs that can't be lost <sup>2</sup>	
10116628	All rubber construction	Exceeds EN requirements for molten metal	Debris Control	

# V-Gard Accessory System: V-Gard Metal Frames for Hard Hats

#### V-GARD FRAMES FOR GENERAL PURPOSES AND ELEVATED TEMPERATURE APPLICATIONS

Markets: Manufacturing; construction; steel/smelting operations

Standards¹: ANSI/IS

**Applications:** Machine operation, maintenance, millwright, extrusion, drilling, blasting, casting/conveying

**Standards¹:** ANSI/ISEA Z87.1-2015; CSA Z94.3

**Certification:** Third-party by Intertek, CSA International (as marked)

Part No.	Material	Product Specifics	
10158799	Heavy-duty anodized aluminum	For use with MSA cap-style hard hats     Spring coil for fast loading of frame to helmet     Three visor resting positions     Locking device holds visor securely in the down position	
10158800	Heavy-duty anodized aluminum	<ul> <li>For use with MSA Skullgard cap-style hard hats</li> <li>Spring coil for fast loading of frame to helmet</li> <li>Three visor resting positions</li> <li>Locking device holds visor securely in the down position</li> </ul>	
10176739	Heavy-duty anodized aluminum	For use with MSA full-brim hard hats     Spring coil for fast loading of frame to helmet     Three visor resting positions     Locking device holds visor securely in the down position	

#### **A WARNING**

 $MSA\ does\ not\ recommend\ V-Gard\ Metal\ Frames\ for\ use\ where\ electrical\ hazards,\ including\ but\ not\ limited\ to\ arc\ flash,\ could\ occur.$ 

<sup>1</sup>Standards requirements met by each V-Gard Frame/V-Gard Visor combination designated on each V-Gard Visor.
<sup>2</sup>Patent pending



# **V-Gard Accessory System: Visors**

#### **V-GARD VISORS: GENERAL PURPOSE**

**Markets:** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining

**Applications:** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing

**Standards¹:** ANSI/ISEA Z87.1-2015; CSA Z94.3 and EN 166 (2C-1.2 MSA 1B); AS/NZS

1337 (except as noted)

Certification: Third-party by Intertek, INSPEC International Ltd.,

CSA International and SAI Global Ltd.

Min Order Qty: 10

power raste	illing, sanding, sawing	min Order Qty: 1∪	
DAN-	Product Specifics		
Part No.	Impact-rated (Z87+) v	vith Maximum UV Protection	
10144486	<b>Material</b> Polycarbonate — clear	<ul> <li>5" (14.61 cm) x 17" (43.2 cm) x .04" (1.02 mm)</li> <li>Contoured visor; closer fit and improved resistance to impact and splash hazards</li> <li>Approved to ANSI and CSA² standards; does not meet EN standards</li> <li>Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</li> </ul>	
10115836	Material Polycarbonate — clear	• 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) • Contoured visor; closer fit and improved resistance to impact and splash hazards	Commence and the first the second of the sec
10115837	Material Polycarbonate — clear	• 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) • Contoured visor; closer fit and improved resistance to impact and splash hazards ■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors	December of the State of the St
10120108	Material Polycarbonate — clear	8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm)     Bulk pack of 20     Contoured visor; closer fit and improved resistance to impact and splash hazards	
10115863 \$\mathbb{\text{RY ITI}}\$	Material Polycarbonate — clear	• 9.5" (24.1 cm) x 17" (43.2 cm) x .04" (1.02 mm) • Contoured visor; closer fit and improved resistance to impact and splash hazards	
10115839	Material Polycarbonate with antifog/anti-scratch coatings for humid conditions — clear	8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)     Slightly thicker for industrial impact applications resistance to impact and splash hazards     Contoured visor; closer fit and improved resistance to impact and splash hazards	
10115841	Material Polycarbonate with antifog/anti-scratch coatings for humid conditions — clear	<ul> <li>8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)</li> <li>Slightly thicker for industrial impact applications resistance to impact and splash hazards</li> <li>Contoured visor; closer fit and improved resistance to impact and splash hazards</li> <li>Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</li> </ul>	
10115842	Material Polycarbonate with antifog/anti-scratch coatings for humid conditions — green tint to reduce glare	<ul> <li>8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)</li> <li>Slightly thicker for industrial impact applications resistance to impact and splash hazards</li> <li>Contoured visor; closer fit and improved resistance to impact and splash hazards</li> <li>Not for use where a Shade infrared (IR) visor is required</li> </ul>	

'Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

# **V-Gard Accessory System: Visors**

#### **V-GARD VISORS: GENERAL PURPOSE**

**Markets:** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining

**Applications:** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing

**Standards¹:** ANSI/ISEA Z87.1-2015; CSA Z94.3 and EN 166 (2C-1.2 MSA 1B); AS/NZS

1337 (except as noted)

Certification: Third-party by Intertek, INSPEC International Ltd.,

CSA International and SAI Global Ltd.

Min Order Qtv: 10

Doub No.	Product Specifics				
Part No.	Impact-rated (Z87+) with Maximum UV Protection				
10115840	<b>Material</b> Polycarbonate — clear	8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)     Slightly thicker for industrial impact applications resistance to impact and splash hazards     Contoured visor; closer fit and improved resistance to impact and splash hazards			
10117783	Material Polycarbonate — clear	• 8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)  • Slightly thicker for industrial impact applications resistance to impact and splash hazards  • Wider design; improved resistance to impact and splash hazards  • Does not meet CSA Z94.3  ■ Flat Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors			

#### **V-GARD VISORS: GENERAL PURPOSE (NON-IMPACT)**

**Markets:** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining

**Applications:** Flying chips and other light debris

Standards': ANSI/ISEA Z87.1-2015; EN 1731-F; and AS/NZS 1337 Certification: Third-party by Intertek, INSPEC International Ltd.,

and SAI Global Ltd. Min Order Qty: 10

Don't No.	Product Specifics					
Part No.	General Protector (Z87) — NOT FOR IMPACT HAZARDS					
10116557	Material Epoxy-coated steel mesh (20 x 20) — black, plastic edged	*8" (20.3 cm) x 17" (43.2 cm)     Not for use against splash, impact, elevated temperatures or UV hazards     Can be worn with earmuffs				
10116558	Material Epoxy-coated steel mesh (20 x 20) — black, plastic edged	•8" (20.3 cm) x 17" (43.2 cm) •Not for use against splash, impact, elevated temperatures or UV hazards • Can be worn with earmuffs ■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors				
10158822	Material Epoxy-coated steel mesh (20 x 20) — aluminum-bound mesh	•8" (20.3 cm) x 16.5" (41.9 cm) •Not for use against splash, impact, electrical or UV hazards				

<sup>1</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.



# **V-Gard Accessory System: Visors**

#### V-GARD VISORS: HEAVY-DUTY CHEMICAL AND SPLASH

**Markets:** General industry, heavy manufacturing, laboratories, chem/petrochemical, agriculture, pharmaceutical, oil and gas, mining **Applications:** Chipping, splash, chemical mixing, grinding, machining,

power fastening, sanding, sawing

**Standards¹:** ANSI/ISEA Z87.1-2015; EN 166 (MSA 1B 3); CSA Z94.3 and AS/NZS 1337

Certification: Third-party by Intertek, INSPEC International Ltd.,

CSA International and SAI Global Ltd.

Min Order Qty: 5

	5,5,5					
Doub No.	Product Specifics					
Part No.	Impact-rated (Z87+)					
10115855	<b>Material</b> Propionate — clear	•8" (20.3 cm) x 17" (43.2 cm) x .098" (2.5mm) •Extra-thick to help prevent warping, cracking or crazing under tough conditions •Please refer to MSA's <i>Chemical Application Quick Reference Guide</i> (ID 0670-007-MC) for chemical performance details				
10115856	Material Propionate — clear	•8" (20.3 cm) x 17" (43.2 cm) x .098" (2.5mm) •Extra-thick to help prevent warping, cracking or crazing under tough conditions ■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors •Please refer to MSA's Chemical Application Quick Reference Guide (ID 0670-007-MC) for chemical performance details				
10115851	Material Propionate — clear	•9.25" (23.5 cm) x 18" (45.7 cm) x .098" (2.5mm)     •Extra-thick to help prevent warping, cracking or crazing under tough conditions     •Extended length and width for greater coverage of neck and face     •Please refer to MSA's Chemical Application Quick Reference Guide (ID 0670-007-MC) for chemical performance details				

NOTE: V-Gard propionate Visors offer both chemical resistance and impact protection, unlike most propionate visors on the market. Not only are they marked with Z87+, but the clear visors are also compliant with EN166, meaning they were tested at a velocity nearly 32% faster than ANSI/ISEA Z87.1-2010.

#### V-GARD VISORS: ELEVATED TEMPERATURE WITH HIGH-PERFORMANCE ANTI-FOG/ANTI-SCRATCH COATINGS

**Markets:** Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, steam tunnels

**Applications:** Hot/humid conditions, chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing, outdoor work

**Standards¹:** ANSI/ISEA Z87.1-2015; EN 166 (2C-1.2 MSA IBT9KN); CSA Z94.3 and AS/NZS 1337

**Certification:** Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.

Min Order Qty: 5

	Product Specifics			
Part No.	Impact-rated (Z87+) with Maxii	num UV Protection		
10115853	Material Polycarbonate with EN 166 performance-rated anti-fog/ anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — clear	•10.375" (26.4 cm) x 17" (43.2 cm) x .098" (2.5 mm) • Molded visor for superior optics under heavy-duty use •Extended length for greater coverage of neck/face •Performs well against many chemicals. Refer to MSA's Chemical Application Quick Reference Guide (ID 0670-007-MC) for details		
10115854	Material Polycarbonate with EN 166 performance-rated anti-fog/ anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — green tint to reduce glare	•10.375" (26.4 cm) x 17" (43.2 cm) x .098" (2.5 mm) •Molded visor for superior optics under heavy-duty use •Extended length for greater coverage of neck/face ◆ Not for use where a Shade infrared (IR) visor is required		

NOTE: V-Gard molded, green and clear visors offer superior optical quality and resistance to many chemicals. For details on optics, please refer to the MSA White Paper, "Optical Quality Requirements and V-Gard® Visors" (ID 0302-32 MC) available for download from MSA's Asset Library.

# V-Gard Accessory System: Visors

#### **V-GARD VISORS: ELEVATED TEMPERATURE**

Markets: Food manufacturing/canneries, steel mills, construction, open pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, steam tunnels

**Applications:** Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding

**Standards**<sup>1</sup>: ANSI/ISEA Z87.1-2015; EN 166 (2C-1.2 MSA IBT89KN);

CSA Z94.3 and AS/NZS 1337

Certification: Third-party by Intertek, INSPEC International Ltd.,

CSA International and SAI Global Ltd.

Min Order Qty: 5

Part No.

#### **Product Specifics**

#### Impact-rated (Z87+) with Maximum UV Protection

#### 10115844

Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) - clear

- •9.25" (23.5 cm) x 17" (43.2 cm) x .098" (2.5mm)
- Molded visor for superior optics under heavy-duty use
- Extra-thick visor helps prevent warping, cracking or crazing
- •Conditioned to a high of 131°F (and a low of -23°F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010)
- ◆ Visors do not reflect IR; not recommended for use against radiant heat hazards



#### 10115845

Material Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — green tint

to reduce glare

•9.25" (23.5 cm) x 17" (43.2 cm) x .098" (2.5mm)

- Molded visor for superior optics under heavy-duty use
- Extra-thick visor helps prevent warping, cracking or crazing
- •Conditioned to a high of 131°F (and a low of -23°F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010)
- Visors do not reflect IR; not recommended for use against radiant heat hazards
- ◆ Not for use where a Shade infrared (IR) visor is required



NOTE: V-Gard molded, green and clear visors offer superior optical quality and resistance to many chemicals. For details on optics, please refer to the MSA White Paper, "Optical Quality Requirements and V-Gard® Visors" (ID 0302-32 MC) available for download from MSA's Asset Library.

#### V-GARD VISORS: RADIANT HEAT/ELEVATED TEMPERATURE

Markets: Metal industries, glass manufacturing, iron and steel foundries, chemical manufacturing, construction, general manufacturing, textile manufacturing, mining, oil and gas

Applications: Grinding, pouring, casting, blowing/melting, rolling, sawing, cutting, crimping, millwrighting, machining/operating, pipelining, pulping

**Standards¹:** ANSI/ISEA Z87.1-2015; EN 166 (2C-2.5 MSA 1BT3R [clear] and

2-4 MSA 1BT3R [green tint]); CSA Z94.3 and AS/NZS 1337

**Certification:** Third-party by Intertek, INSPEC International Ltd.,

CSA International and SAI Global Ltd.

Min Order Qty: 5

Part No.

#### **Product Specifics**

Material

#### Impact-rated (Z87+) with Maximum UV Protection

#### 10115848

# (SP

Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — clear

- 9.5" (24.1 cm) x 17.75" (45.09 cm) x .07" (1.8 mm)
- Reflective coating reflects IR and helps dissipate heat: reflects >60% Infrared (IR) radiation (EN166 R mark) in the 780nm to 2000nm wavelength
- Thick visor helps prevent warping, cracking or crazing
- Extended length for greater coverage of face and neck; **DO NOT use for welding**



### 10115850

#### Material

Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) —- green tint to reduce glare

- 9.5" (24.1 cm) x 17.75" (45.09 cm) x .07" (1.8 mm)
- Reflective coating reflects IR and helps dissipate heat: reflects >60% Infrared (IR) radiation (EN166 R mark) in the 780nm to 2000nm wavelength
- Thick visor helps prevent warping, cracking or crazing
- Extended length for greater coverage of face and neck; **DO NOT use for welding**
- ◆ Not for use where a Shade infrared (IR) visor is required



NOTE: Reflective-coated visors offer protection from irradiance, or the electromagnetic radiation (EMR) energy created in elevated temperature environments. V-Gard Reflective Coated Visors offer an EN166 "R" mark. This means they have been certified to reflect >60% Infrared (IR) radiation in the 780 nm to 2000 nm wavelengths. V-Gard Reflective Visors have been shown to reduce temperatures behind the visor by several hundred degrees, and lower irradiance to below 0.1 kW/m². For details on V-Gard Reflective-Coated Visor performance, please see the MSA White Paper, "Radiant Heat Resistance" (ID 0670-020 MC) and "MSA V-Gard® Reflective-Coated Visors: Radiant Heat Resistance Simplified" (ID 0670-023 MC), available on MSAsafety.com.

Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.





# **V-Gard Accessory System: Visors**

#### V-GARD VISORS: WELDING (SHADE 3 AND SHADE 5)

**Markets:** Fabrication, steel mills, shipbuilding, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing

**Applications:** Welding, metal pouring, gas soldering, light cutting/brazing, manufacturing, impact and debris

**Standards':** ANSI/ISEA Z87.1-2015; EN 166 (4-3/3 MSA 1BT39 [shade 3] and 4-5/5 MSA 1BT39 [shade 5]); CSA Z94.3 and AS/NZS 1337

**Certification:** Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.

Min Order Qty: 5

Part No.	Product Specifics				
Fait No.	Impact-rated (Z87+)				
10115859	Material Polycarbonate — Shade 3 IR	• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm) •Thickness helps prevent pitting and warping from heat or weld spatter			
10115860	Material Polycarbonate — Shade 3 IR	• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm) • Thickness helps prevent pitting and warping from heat or weld spatter ■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors			
10115861	Material Polycarbonate — Shade 5 IR	• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm) • Thickness helps prevent pitting and warping from heat or weld spatter			
10115862	<b>Material</b> Polycarbonate — Shade 5 IR	• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm) • Thickness helps prevent pitting and warping from heat or weld spatter ■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors			

#### V-GARD VISORS: ARC FLASH APPLICATION<sup>2</sup>

**Markets:** Manufacturing, utilities, construction, oil/gas/ petrochemical **Applications:** Maintenance, impact and debris, testing/repair

**Standards¹:** ANSI/ISEA Z87.1-2015; ASTM F2178-2008 (Ref: NFPA 70E, HRC 2)

Certification: Third-party by Intertek and ArcWear

Min Order Qty: 5

Davit Na	Product Specifics			
Part No.	Impact-rated (Z87+)			
10115847	Material Polycarbonate — special tint, gray-blue visor; molded	• 9.25" (23.5 cm) x 18" (45.7 cm) x .065" (1.7 cm)  • Extended length and width for greater coverage of face and neck  • Rated to 16.0 cal/cm² when tested to ASTM F2178-2008 (ref. NFPA 70E-2015 PPE Category 2), and when worn with a V-Gard Hard Hat (PN 475358) and V-Gard Frame (PN 10115730)  Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames and MSA Helmet combinations		
10118480	Material Polycarbonate — special tint, gray-blue visor; molded (for use with designated V-Gard Chin Protector)	Arc Visor Kit—consists of Visor (PN 10115858) + Chin Protector (PN 10115827)  • 8" (20.3 cm) x 17.25" (43.8 cm) x .065" (1.7 cm)  • Extended length and width for greater coverage of face and neck  • Rated to 21.0 cal/cm² when tested to ASTM F2178-2008 (ref. NFPA 70E-2015 PPE Category 2), and when worn with a V-Gard Hard Hat (PN 475369) and V-Gard Frame (PN 10116627) and V-Gard Standard Chin Protector (PN/10115827)  Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames and MSA Helmet combinations		

<sup>&</sup>lt;sup>1</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

<sup>&</sup>lt;sup>2</sup>Do not use V-Gard Arc Visors with V-Gard Headgear. These visors are designated for use with specified V-Gard Frames and MSA helmets ONLY. See "V-Gard Headgear" for additional details.

# V-Gard Accessory System: V-Gard Headgear

V-Gard Headgear can be used for face protection when head protection is not required. V-Gard Headgear is available in two versions: General Purpose and Elevated Temperature (Extended). V-Gard Headgear are designed and approved for use with V-Gard Visors.<sup>1</sup>

#### **V-GARD HEADGEAR**

**Markets:** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining, chemical industries

**Applications:** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing, laboratory

Size: Standard (6½ - 8)

**Sandards<sup>2</sup>:** ANSI/ISEA Z87.1-2015; EN 166; CSA Z94.3; and AS/NZS 1337

**Certification:** Third-party by Intertek, INSPEC International Ltd.,

CSA International and SAI Global Ltd.

fastening, sa	ınding, sawing, laboratory		
Part No.	Product Name	Product Specifics	
10127061	V-Gard Headgear — General Purpose Material: High Density Polyethylene (HDE) – black	Patent-pending, Infini-just lift/closure with grippable knobs that don't unscrew; no parts to lose Ratchet closure Seven-point crown adjustment Replaceable, sweat-wicking, cushioned headband helps keep workers dry and cool Sweat-wicking ratchet cover keeps nape comfortable For use ONLY with V-Gard Visors; not for use where head protection is required All non-metal construction Minumum order quantity: 10	
10127062	V-Gard Headgear — Elevated Temperature Material: Heat-resistant nylon — gray	Extended browguard for additional coverage in high temperatures Tested to withstand temperatures up to 400 °F³ Patent-pending, Infini-just lift/closure with grippable knobs that don't unscrew; no parts to lose Ratchet closure Seven-point crown adjustment Replaceable, sweat-wicking, cushioned headband helps keep workers dry and cool Sweat-wicking ratchet cover keeps nape comfortable For use ONLY with V-Gard Visors; not for use where head protection is required All non-metal construction Minumum order quantity: 5	
10127063	V-Gard Headgear Kit — General Purpose	<ul> <li>Kit Contains:</li> <li>V-Gard General Purpose Headgear (PN 10127061)</li> <li>V-Gard Clear, PC Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836)</li> </ul>	
10127065	V-Gard Headgear Replacement Sweatband <sup>4</sup>	Sweat-wicking material over breathable foam helps keep workers cool, dry and comfortable     Hook & loop closure makes replacement easy     Tested to the FR requirements in CSA Z94.3-07     Sold in boxes of 25 (5 packages of 5)	

**DO NOT** use V-Gard Headgear with V-Gard Arc Visors tested to ASTM F2178-2008 Test Method (ref. NFPA 70E-2012, Hazard Risk Category). These visors are designated for use with specified V-Gard Frames and MSA helmet ONLY as face protection for workers exposed to high voltage electric arcs. V-Gard Headgear has not been tested or certified to the Test Method, and should not be used for this type of Arc Flash protection.

<sup>&</sup>lt;sup>2</sup> Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

<sup>&</sup>lt;sup>3</sup> Exposure to extreme heat can cause thermal discomfort. Proper precautions should be taken to prevent heat stress and other injuries.

<sup>&</sup>lt;sup>4</sup> Use only genuine MSA V-Gard Headgear replacement parts to help ensure compatibility and compliance. MSA does not warrant, guarantee or promote the use of components manufactured by other companies when used in conjunction with MSA products.



# V-Gard Accessory System: V-Gard Chin Protectors<sup>1</sup>

Work with select V-Gard Nitrometer Visors to provide extra protection from impact and splash hazards to face and neck.

V-GARD CI	V-GARD CHIN PROTECTORS			
Part No.	Product Name	Material	Product Specifics	
10115828	Retractable Chin Protector	Polycarbonate – opaque (ensures safety and standards compliance with clear, tinted, shaded and coated V-Gard Visors)	3.82" (9.7 cm) in height, when unretracted     Unique retractable plates allow greater flexibility of head movement both up and down, as well as side-to-side     Minimum order quantity: 5	Missa
10149029	Chin Protector	Polycarbonate – clear (for improved visibility)	2.86" (7.26 cm) in height     Compact, lightweight design provides additional protection between chin and neck area     Should not be worn with tinted, arc or shaded nitrometer visors to ensure compliance with stated Standards markings/requirements     Minimum order quantity: 5	
10115827	Standard Chin Protector	Polycarbonate – opaque (ensures safety and standards compliance with clear, tinted, shaded and coated V-Gard Visors)	2.86" (7.26 cm) in height     Compact, lightweight design provides additional protection between chin and neck area     Minimum order quantity: 5	Man

# V-Gard Accessory System: Replacement Parts<sup>2</sup>

V-GARD A	V-GARD ACCESSORY SYSTEM REPLACEMENT PARTS				
Part No.	Product Name	Product Specifics			
		For use with V-Gard Frames for Slotted Caps     Sold in boxes of 5 (5 packages of 1 pair)	AA		
10225804	Hat Frame Replacement Slot Adapters	For use with V-Gard Frames for Slotted Hats Sold in boxes of 5 (5 packages of 1 pair) Hat Frame Replacement Slot Adapter is marked with an "H" (see inset image)	JAA		
10116539	Debris Control for V-Gard Frames	Debris control exceeds EN requirements for molten metal     All-rubber construction     Minimum order quantity: 10			
10117495	Heavy-duty Rubber Strap	For V-Gard Universal Cap or Hat Frames     Minimum order quantity: 10			

<sup>1</sup> MSA V-Gard Chin Protectors meet the applicable safety requirements as noted on the V-Gard Nitrometer Visor when worn in conjunction with V-Gard Frames and V-Gard Nitrometer Visors.

<sup>&</sup>lt;sup>2</sup> Use only genuine MSA V-Gard Accessory System replacement parts to help ensure compatibility and compliance. MSA does not warrant, guarantee, or promote the use of components manufactured by other companies when used in conjunction with MSA products.

# **V-Gard Accessory System: Kits**

V-GARD A	CCESSORY SYSTEM I	KITS	
Part No.	Product Name	Product Specifics	
10118695	V-Gard Accessory System Kit — with V-Gard Cap-Style Hard Hat	<ul> <li>Kit Contains:</li> <li>White V-Gard Cap with ratchet suspension (PN 475358)</li> <li>V-Gard Frame for Slotted Caps; with debris control (PN 10115730)</li> <li>V-Gard Clear, Polycarbonate Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836)</li> </ul>	
10118697	V-Gard Accessory System Kit — without V-Gard Cap-Style Hard Hat	<ul> <li>Kit Contains:</li> <li>V-Gard Universal Frame for Caps with debris control (PN 10115822)</li> <li>V-Gard Clear, Polycarbonate Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836)</li> <li>▶ Does not contain an MSA safety helmet.</li> </ul>	The state of the s
10118694	V-Gard Forestry Kit	<ul> <li>Kit Contains:</li> <li>Hi-Viz orange V-Gard Cap with ratchet suspension (PN 488146)</li> <li>V-Gard Frame for Slotted Caps; with debris control (PN 10115730)</li> <li>V-Gard Mesh Nitrometer (PN 10116558)</li> <li>V-Gard Retractable Chin Protector (PN 10115828)</li> <li>left/RIGHT, HIGH (NRR 28 db) Cap-Mounted Earmuffs (PN 10087422)</li> </ul>	
101186961	V-Gard Accessory Arc Kit	<ul> <li>White V-Gard Cap with ratchet suspension (PN 475358)</li> <li>V-Gard Frame for Slotted Caps (PN 10121266)</li> <li>V-Gard Arc Nitrometer with V-Gard Standard Chin Protector (PN 10118480); must be assembled by user prior to wearing to secure stated calorie rating.</li> <li>Rated to 11.3 cal/cm² when tested to ASTM F2178-2008 (ref. NFPA 70E-2012, Hazard Risk Category 2), and when worn with a V-Gard Cap (PN 475358), V-Gard Frame (PN 10121266) and V-Gard Standard Chin Protector (PN/10115827)</li> </ul>	S S S S S S S S S S S S S S S S S S S

<sup>1</sup> Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames, V-Gard Chin Protectors and MSA Helmet combinations.



### **Hard Hat Accessories**

### V-Gard Winter Liners

V-Gard Winter Liners deliver extra warmth and protection under hard hats.

/-GARD W	/INTER LINERS		
Part No.	Product Name	Product Specifics	
10118417 (18 <sup>1</sup> IT)	V-Gard Winter Liner, Knit Cap	Stylish skullie cap     Design prevents liner from obstructing vision     100% high bulk acrylic     Sold in sets of 12	
10118418	V-Gard Winter Liner, Knit Hat/Cap Cover	100% acrylic     Bright yellow-green for greater visibility     Full face tube mounts under or over brim of MSA caps or hats, covering ears, mouth, cheeks and neck     Extended nape and wraparound collar for tucking into coat/shirt     Sold in sets of 12	
10118427	V-Gard Supreme Liner, Flame-Resistant 2-piece	Fabric tested to withstand arc exposure to an ATPV of 8 cal/cm²     Water repellant     Inside neck pocket holds warming packet²     Multi-layered flame-resistant top cap     Extended, zipper on/off high-bulk flame-resistant knit bottom     No metal parts     Sold in sets of 3	


**Note: Flame resistant (FR)** liner is made of special fibers that allow it to self-extinguish when exposed to flame or thermal ignition. Flame resistance cannot be removed by washing. Unlike many other winter liners in the market, ALL layers of fabric in V-Gard Supreme Liner are flame-resistant, affording FR protection throughout the life of the product.<sup>3</sup> For this reason, only V-Gard Supreme Liner offers resistance to arc exposure.

<sup>&</sup>lt;sup>1</sup>Follow all instructions and perform daily, pre-, and post-use inspections.

<sup>&</sup>lt;sup>2</sup> Warming packets available at most sporting goods retailers; not sold with liners.

<sup>&</sup>lt;sup>3</sup> Garment care instructions must be followed.

# **Hard Hat Accessories**

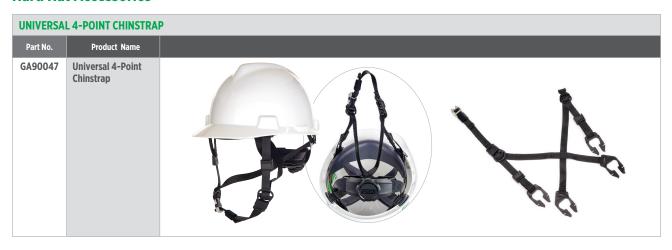

STANDARD	CHINSTRAPS		
Part No.	Product Name	Product Specifics	
101711031	2-Point Chinstrap	Non-metal chinstraps keep helmets in place Flexible construction and adjustable design for long-wearing comfort  ''' Nomex webbing Attaches to shell	
10171104	2-Point Chinstrap	Non-metal chinstraps keep helmets in place Flexible construction and adjustable design for long-wearing comfort  ''y" polyester webbing Attaches to shell	
10171105	2-Point Chinstrap	Non-metal chinstraps keep helmets in place Flexible construction and adjustable design for long-wearing comfort  '4" cotton webbing Attaches to shell	
10171106	2-Point Chinstrap	Non-metal chinstraps keep helmets in place Flexible construction and adjustable design for long-wearing comfort  '' cotton webbing Attaches to suspension <sup>2</sup>	
10171107	2-Point Chinstrap	Non-metal chinstraps keep helmets in place Flexible construction and adjustable design for long-wearing comfort  ''y" polyester webbing Attaches to suspension <sup>2</sup>	
10124238	4-Point Chinstrap	Non-metal chinstraps keep helmets in place Flexible construction and adjustable design for long-wearing comfort  ''y polyester webbing Attaches to suspension <sup>2</sup> Pkg/10	

<sup>&</sup>lt;sup>1</sup>For elevated temperatures; flame-resistant. Not recommended for use where molten metal splash hazards exist. <sup>2</sup>Staz-On suspension only.



# **Hard Hat Accessories**



### **SUNSHADE HARD HAT ACCESSORIES**

Part No.	Product Name	Product Specifics
10098032	SunShade	Fit most hats and caps
TRY IT!	Hard Hat Accessory	<ul> <li>Breathable, bright mesh fabric</li> </ul>
	Yellow-green, with reflective striping	Hat clips help to keep SunShade from falling or rotating
10098031	SunShade Hard Hat Accessory	Minumum order quantity: 5
	Orange, with reflective	



SHIN		

Part No.	Product Name	Product Specifics
697290	for standard V-Gard Cap-Style Hard Hats <i>only</i>	against sun and heat  • Smoke-tinted Lexan front for extra protection
697410	Sun Shield for standard V-Gard Full-Brim Hard Hats <i>only</i>	
10039114	Sun Shield for standard V-Gard 500 Cap-Style Hard Hats <i>only</i>	

ı	HARD HAT SWEATBAND					
ı	Part No.	Product Name	Product Specifics			
	696688	<b>Terri-Band Sweatband</b> Gray, pkg/10	Custom design fits all MSA suspensions     Washable, with plastic snaps			
	10068911	<b>Terri-Band Sweatband</b> Gray, single				



EMERGENO	7 78		
Part No.	Product Name	Product Specifics	
10013393 Emergency Medical Information Accessory		Provides crucial, lifesaving information in the event of a medical crisis on the job     Pkg of 10	Eigenement -
		Trilingual: English/Spanish/French	inside view



EMERGE	EMERGENCY MEDICAL INFO ACCESSORY					
Part No.	Product Name	Product Specifics				
804358	In-Service Label	To track shells service life, affix label inside helmet with date of helmet's first use  MSA recommended replacement: shell every years/suspension every 12 months				

DAT	TE PLACED IN SERVICE	DATE PLACED IN SERVIC			
DAT	TE PLACED IN SERVICE	DATE PLACED IN SERVICE			
DAT	TE PLACED IN SERVICE	DATE PLACED IN SERVIC			
DAT	TE PLACED IN SERVICE	DATE PLACED IN SERVIC			
DAT	TE PLACED IN SERVICE	DATE PLACED IN SERVIC			
APC	0121 Rev. 1				80435

# **Industrial Hearing Protection and Communication Systems**

MSA has hearing protection products for nearly every industrial application. In fact, MSA offers what customers want most: economical options, cutting-edge technology, quality and outstanding performance.

# **V-Gard Helmet-Mounted Hearing Protection**



### Superior Performance

- Offers the highest attenuation for a cap-mounted earmuff on the market.
- Custom MSA sealing rings allow for optimal NRR performance.
- Works with slotted MSA industrial cap-style hard hats.
- Works with existing MSA visors and frames for seamless integration into your safety program.



# **Enhanced Comfort and Fit**

- Improved sealing ring and adapters optimize pressure on the ears for all-day comfort.
- Foam-injected ear pads cushion the outer ears to allow for soft points of contact.
- Vertical adjustment allows for custom fit.
- Recessed interior foam does not touch user's ear while in use.
- When not in use, earmuffs may be stowed in "parking" position, ready for when you need them.



# Modern Style

- Includes the next generation "V" design from the iconic V-Gard.
- Incorporates red, yellow, and green color-coding on the backplate and front logo to easily identify level of attenuation
- Upgraded fork design provides a sleek look and modernized feel.
- Matte material for both cup and ear pads decreases look of wear and tear.

NRR and CSA Class Ratings for V-Gard Hearing Protection							
	LOW		MEDIUM		HIGH		
	NRR	CSA Class	NRR	CSA Class	NRR	CSA Class	
V-GARD CAP (medium)	22	В	27	А	31	AL	
V-GARD CAP (small)	23	В	28	AL	31	AL	
V-GARD CAP (large)	23	В	27	AL	30	AL	
THERMALGARD CAP	24	А	27	А	29	AL	
SUPER-V CAP	23	В	28	AL	30	AL	

NRR and CSA Class Ratings for V-Gard Hearing Protection							
	LOW		MEDIUM		HIGH		
	NRR	CSA Class	NRR	CSA Class	NRR	CSA Class	
V-GARD 500 CAP	22	В	28	AL	31	AL	
TOPGARD CAP	24	А	28	AL	30	AL	
SMOOTHDOME CAP	24	А	27	AL	30	AL	
V-GARD H1 HELMET	coming soon						

V-GARD CAP-MOUNTED HEARING PROTECTION						
PRODUCT NAME	V-Gard	V-Gard	V-Gard			
ATTENUATION LEVEL	LOW	MEDIUM	HIGH			
PART NO.	10190356	10190357	10190358			

PRODUCT NAME	Hygiene Kit	Hygiene Kit	Hygiene Kit
PART NO.	10193450	10193451	10193452
PRODUCT SPECIFICS	for V-Gard Cap-Mounted Hearing Protection, <b>LOW</b>	for V-Gard Cap-Mounted Hearing Protection, <b>MEDIUM</b>	for V-Gard Cap-Mounted Hearing Protection, <b>HIGH</b>

<sup>&</sup>lt;sup>1</sup> https://www.osha.gov/dts/osta/otm/noise/hcp/attenuation\_estimation.html





#### **DID YOU HEAR?**

The **Noise Reduction Rating (NRR)** describes the average sound level reduction ("attenuation") provided by hearing protectors in a laboratory setting. Because the NRR reflects lab (and perhaps not real-world) usage, the Occupational Safety and Health Administration (OSHA), recommends "de-rating" the NRR to help account for incorrect fit and inconsistent wear time on worksites. OSHA's methodology for Estimating Hearing Protector Attenuation!:

1. 8-hour Time Weighted Exposure (TWA) = 94 dBA

2. NRR of hearing protector = 31 dBA

3. Subtract 7 dB from the NRR = 31 dB - 7 dB is 24 dB

4. Reduce value by 50% = 12 dB

5. Subtract this value from the TWA = 82 dB (Estimated Protection)

6. Decide if the Estimated Protection works for your environment!

# SoundControl Classic Helmet-Mounted Hearing Protection for MSA *Non-Slotted* Hard Hats

Markets: General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, mining

**Applications:** High-noise environments, industrial plants, construction sites

Standards: Meets ANSI S3.19-1974 and CSA Class A Standards

Compatible PPE:

- V-Gard Slotted and Universal Frames—no additional parts needed
- Most V-Gard Visors
- MSA non-slotted hard hats

#### SOUNDCONTROL CLASSIC HELMET-MOUNTED HEARING PROTECTION (FOR MSA NON-SLOTTED HARD HATS)





#### **DID YOU HEAR?**

The **EPA requirement (40 CFR 211)** specifies that hearing protectors sold in the U.S. must be tested to ANSI S3.19-1974 and labeled with a Noise Reduction Rating (NRR). MSA Hearing Protectors have been tested and labeled according to the EPA requirements. Standards organizations, such as ANSI and CSA, do not approve or certify hearing protectors.


# **Headbands: left/RIGHT Hearing Protection**

**Markets:** General industry, manufacturing, repair and maintenance, construction, OGP, forestry, shipbuilding, mining **Applications:** 

- Heavy mechanical industries, compression rooms, airports (HIGH)
- Utilities, construction, general industry (MEDIUM)
- Food manufacturing, automotive, light industry (LOW)

Standards: Meets ANSI S3.19-1974 and CSA Class A Standards

#### **Ieft/RIGHT HEARING PROTECTION**

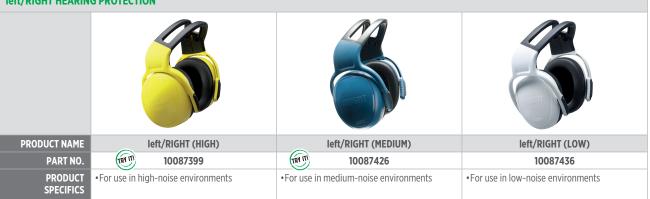

PRODUCT NAME	left/RIGHT (HIGH) Hygiene Kit	left/RIGHT (MEDIUM) Hygiene Kit	left/RIGHT (LOW) Hygiene Kit
PART NO.	10092880	10092879	10092878
PRODUCT SPECIFICS			



#### **DID YOU HEAR?**

The **attenuation of an earmuff depends on the fit** of the muff against the head and around the pinnae (i.e., the "tightness" of the seal). Gaps, including those caused by safety glasses, provide an easy path for sound to travel, reducing protection levels. To reduce this effect, try not to put anything under the cup (such as pencils, hair, etc.). But, if you must wear protective eyewear, select either those with a thin strap or a very thin temple. If the gap is noticeable, the protection level is compromised.



# **Headbands: SoundControl Classic Hearing Protection**

Markets: General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, mining

**Applications:** Confined space, sanding/grinding, power tool use, occupations with non-impulse noise, demolition, assembly

Standards: Meet ANSI S3.19-1974 and CSA Class A Standards

#### SOUNDCONTROL CLASSIC HEARING PROTECTION





PRODUCT NAME	SoundControl HPE	
PART NO.	10061271	
NRR	26 dBA	
PRODUCT SPECIFICS	Lightweight, low-profile High attenuation and excellent sealing for reliable protection Headband design and 2-point cup mounting distributes weight evenly, offering outstanding balance and comfort No metal parts Cups can be moved to various wearing positions for custom fit	



•Unique injection-molded inserts provide excellent attenuation and maximum ear

10061229 24 dBA

- Medium attenuation for moderate high noise exposures
- •3 distinct wearing positions
- Cups can be moved to a range of wearing positions for custom fit



	00
PRODUCT NAME	EXC Hygiene Kit
PART NO.	10061292
PRODUCT SPECIFICS	•Foam cushions and inserts

# **Economuff™ Earmuff Value Hearing Protection**

Economuff Earmuff hearing protectors provide cost-effective options that don't sacrifice comfort or protection.

Markets: Repair and operation (MRO), mining, food and beverage manufacturing, metal fabrication, oil and gas, general manufacturing Applications: Facility maintenance, grinding, machine operations, sanding, welding, demolition, painting, assembly, cleaning

Standards: Meet ANSI S3.19-1974 and CSA Class B Standards

Compatible PPE: MSA helmets1

#### **ECONOMUFF HEARING PROTECTION**





PRODUCT NAME	Economuff Multi-Position	Economuff
PART NO.	10061273	10004291
NRR	23 dBA (under chin/behind head) 24 dBA (over the head)	20 dBA
PRODUCT	Offers 3 positions: under the chin, behind the head or over the head	•Soft wide cushions maintain comfortable pressure around ears
SPECIFICS	•Under the chin or behind the head positions allow use of head protection	•Lightweight
	Durable design for use in tough environments	•1 size fits most
	•No metal parts	•No metal parts
	Padded headband makes longer wear possible	Most economical option
	•1 size fits most	

<sup>1</sup>Economuff Earmuff multi-position worn in behind-the-head or under-the-chin positions only.

# **Sightgard Safety Glasses**

Material: Polycarbonate

Standards<sup>1</sup>: ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)

**Certification:** Third-party by ICS and CSA International **Minimum Order Qty:** 12


#### Indoor

**Markets:** Facility maintenance, repair and operations, construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, transportation, shipbuilding, automotive

**Applications:** Assembly and mechanical, drilling, grinding, machining, painting, sanding, sawing












# Indoor/Humid Conditions

**Markets:** Facility maintenance, repair and operations, construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, transportation, shipbuilding, automotive

**Applications:** Assembly and mechanical, drilling, grinding, machining, painting, sanding, sawing





INDOOR/HUMID	3
MODEL	
Pyrenees	
PART NO.	
10033718	
SAFETY FEATURES	STYLING
Impact-rated (Z87+)     Anti-fog coating	Clear lens Full side protection Dual injected, soft-tipped temples

<sup>&</sup>lt;sup>1</sup> CSA International certified models are denoted with a **\$\frac{1}{2}** symbol .





# **Sightgard Safety Glasses**

Material: Polycarbonate

Standards<sup>1</sup>: ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)

**Certification:** Third-party by ICS and CSA International **Minimum Order Qty: 12** 

#### INDOOR/HUMID MODEL Voyager PART NO. **(P)** 10065849 **SAFETY FEATURES** STYLING • Impact-rated (Z87+) • Clear lens Anti-fog coating • Single wrap-style lens

# Indoor/Outdoor

Markets: General industry, manufacturing, construction, oil and gas, forestry, shipbuilding, automotive, food and beverage, mining, pharmaceuticals, primary metals, transportation

Applications: Assembly and mechanical, chipping, chiseling, cleaning, drilling, grinding, machining, masonry, riveting, sanding, sawing, UV protection







#### Outdoor

Markets: Aviation, general manufacturing, mining, oil and gas, pharmaceuticals, primary metals, transportation

Applications: Assembly and mechanical, chipping, chiseling, drilling, grinding, machining, sanding, sawing









<sup>&</sup>lt;sup>1</sup> CSA International certified models are denoted with a symbol



# **Sightgard Safety Glasses**

Material: Polycarbonate

Standards<sup>1</sup>: ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)

**OUTDOOR** MODEL TRY IT Pyrenees PART NO. **(P)** 10033719 **SAFETY FEATURES** STYLING • Impact-rated (Z87+) · Gray tint lens · Anti-fog coating • Full side protection • Dual-injected soft-tipped temples • Single wrap-style lens · Full side coverage

# Outdoor with UV Exposure

Markets: General industry, manufacturing, construction, oil and gas, forestry, shipbuilding

Applications: Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing







protection (U6)

#### **DID YOU KNOW?**

A common misconception is that all polycarbonate blocks UV. This is not the case. Under ANSI/ISEA Z87.1-2015 there is a required marking if the manufacturer claims protection from UV. Look for eyewear that both meets ANSI/ISEA Z87.1-2015 and has a U mark.

<sup>1</sup> CSA International certified models are denoted with a symbol




Certification: Third-party by ICS and CSA International **Minimum Order Qty: 12** 

#### Over-the-Glasses

Markets: Facility safety, maintenance, repair and operations, overhaul, general industry, manufacturing, construction, oil and gas, metalworking, automotive **Applications:** Assembly and mechanical, drilling, grinding, machining, masonry, power fastening, riveting, sanding, sawing











# **Sightgard Safety Glasses**

Material: Polycarbonate

Standards<sup>1</sup>: ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)

Certification: Third-party by ICS and CSA International

Minimum Order Qty: 12

### Low Light

**Markets:** Transportation, inspection and repair, assembly, general industry, indoor construction, shipbuilding, automotive, food and beverage, pharmaceuticals

**Applications:** Assembly, chipping, chiseling, drilling, grinding, machining, pouring/casting, power fastening, riveting, sanding, sawing






# Magnifiers

**Markets:** Facility safety, maintenance, repair and operations, overhaul, general industry, manufacturing, construction, metalworking, automotive

**Applications:** Fine assembly and detail work, drilling, grinding, machining, soldering, riveting, sanding



# Welding


**Markets:** General industry, manufacturing, construction, oil and gas, forestry, shipbuilding, metalworking; automotive, aviation

**Applications:** Welding, chiseling, drilling, grinding, machining, masonry, pouring/casting, power fastening, riveting, sanding, sawing

WELDING MODEL Clearvue® IR PART NO. 10012847	
SAFETY FEATURES	STYLING
• Impact-rated (Z87+)	Classic look with Infrared (IR) radiation eye protection, up to Shade 5 Fits over most Rx glasses Integral, vented side shields

<sup>&</sup>lt;sup>1</sup> CSA International certified models are denoted with a symbol

# **Sightgard Safety Goggles**

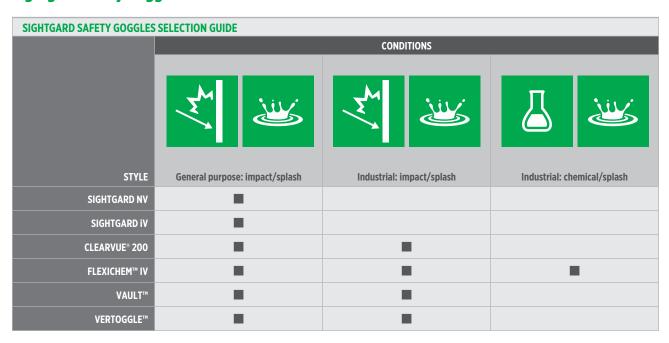

Standards¹: ANSI/ISEA Z87.1-2015 and CSA Z94.3 Certification: Third-party by ICS and CSA International





<sup>&</sup>lt;sup>1</sup> CSA International certified models are denoted with a symbol.



WARNING: The products listed below can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP) which is known to the State of California to cause cancer or reproductive harm. For more information, visit www.P65Warnings.ca.gov.

MSA Product Part No.	MSA Product Description	CA Prop 65 Chemical Name	Chemical Hazard Type
10106281	Safety Goggles, FlexiChem iV, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive



# **Sightgard Safety Goggles**

Standards<sup>1</sup>: ANSI/ISEA Z87.1-2015 and CSA Z94.3 Certification: Third-party by ICS and CSA International

# **SAFETY GOGGLES** MODEL Clearvue 200 PART NO. 10029693 (TRY IT) (1)

#### **SAFETY FEATURES**

- Impact-rated (Z87+)
- Splash-rated (D3)
- · Anti-fog coating

# PRODUCT SPECIFICS

- Clear acetate lens resists warping, cracking and crazing from chemical splash
- Flame-retardant strap
- Soft, pliable goggle body ensures all-day comfort
- Indirect vent helps eliminate fogging while retaining splash resistance
- Minimum order quantity: 6

# **SAFETY GOGGLES** MODEL FlexiChem iV PART NO.

10106281



#### **SAFETY FEATURES**

- Impact-rated (Z87+)
- Splash-rated (D3)
- Anti-fog coating

#### **PRODUCT SPECIFICS**

- Clear acetate lens resists warping, cracking and crazing from chemical splash
- Flame-retardant strap
- · Soft, pliable goggle body ensures all-day comfort
- Indirect vent helps eliminate fogging while retaining splash resistance
- Minimum order quantity: 6

#### **SAFETY GOGGLES**

MODEL

Vault

PART NO.

10106282



#### **SAFETY FEATURES**

- Impact-rated (Z87+)
- Splash-rated (D3)
- · Anti-fog coating

#### **PRODUCT SPECIFICS**

- · Modern styling
- Comfortable, thick strap
- · Minimum order quantity: 6

#### **SAFETY GOGGLES**

#### MODEL

Sightgard Vertoggle™ Safety Goggles/ Faceshield Combination

PART NO.

10150069 (TRY IT!





#### SAFETY FEATURES

- Impact-rated (Z87+)
- Splash-rated (D3)

#### PRODUCT SPECIFICS

- Clear polycarbonate lens
- Anti-fog coating anti-scratch coating on goggle lens
- · Frosted polycarbonate faceshield
- Soft, pliable goggle body helps ensure all-day
- Unique, articulated lift-front retains the shield on the goggle in any of five positions
- Indirect venting on goggle and faceshield improve airflow while providing splash and high impact protection
- Entire assembly tested at ANSI/ISEA Z87.1-2010 faceshield impact speed (300 ft/sec)
- Fully adjustable FR-tested (CSA Z94.3 test methodology) elastic strap prevents hair pulling
- Disposable respirators can be worn under shield
- Designed to work with MSA goggle retainers
- Minimum order quantity: 5

<sup>1</sup> CSA International certified models are denoted with a **\$\mathbb{G}^\*** symbol .



WARNING: The products listed below can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP) which is known to the State of California to cause cancer or reproductive harm. For more information, visit www.P65Warnings.ca.gov.

MSA Product Part No.	MSA Product Description	CA Prop 65 Chemical Name	Chemical Hazard Type
10106268	Safety Goggles, Sightgard NV, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive
10106270	Safety Goggles, Sightgard iV, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive
10029693	Safety Goggles, Clearvue 200, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive
10150069	Safety Goggle and Faceshield Combination, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive

# **Eyewear and Goggle Accessories**

ACCESSORIES					
Part No.	Product Name	Product Specifics			
459458 for caps (1277) 449895 for hats (1277)	Goggle Retainer	Sturdy neoprene-rubber accessory Can be used with any protective cap or hat Retains goggle on headwear when not in use Holds goggle securely when worn for eye protection.  MSA goggle retainers are manufactured for use ONLY with MSA goggles in order to comply with the applicable standards of the products in the assembly.			
10020871	Deluxe Eyewear Lanyard	Holds eyewear securely     Lanyard strap slides     over temple     Pkg of 12			
13016	Fogpruf™ Cleaner Refill	• 4 Oz. bottle	long of the state		
10022087	Towelettes	• Pre-moistened • Box of 100	Manage of the state of the stat		



# Save money, increase revenue and reduce inventory costs with our comprehensive Above-the-Neck safety solutions:

- "Try It" sample program offers 100+ leading MSA products, including V-Gard Hard Hats, V-Gard Accessories, left/RIGHT earmuffs, and Sightgard® eyewear—completely **FREE of charge!** Look for the tells you which products are in the program.
- Our products are tested by engineers in our own test facilities. They are also certified and/or tested by qualified, third-party test houses.

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice. MSA is a registered trademark of MSA Technology, LLC in the US, Europe, and other Countries. For all other trademarks visit https://us.msasafety.com/Trademarks.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit MSAsafety.com/offices.