



Thermal protection

# TEMPTEC 332

Temperature above 150°C | Chemical environment



CHEMICAL PROTECTION  
**TYPE A**

EN388



2212X

EN ISO 374-1



TYPE A  
ACLMNS

EN511 (COLD)



111

EN407



X2XXXX

CAT.3



0334

DEXTERITY

EN 420:  
5/5

Effective thermal insulation and resistance to a wide range of chemical

## SPECIFIC ADVANTAGES

### Thermal protection

- Excellent thermal insulation, due to double-knit cotton



### Productivity

- Good grip on slippery objects, due to the embossed texture



### Skin protection

- Multi-purpose chemical resistance (acids, aliphatic solvents) increased by the thickness of the material



### Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

## INDUSTRIES

- Mechanical industry
- Petrochemical industry
- Other industries
- Rubber industry

## APPLICATIONS

- Chemical treatment of metals
- Oil quenching of steel
- Sampling of hot petrochemical products
- Polymer extrusion
- Boiler room work
- Handling of hot piping
- Handling of moulds in the ceramic industry
- Manufacture of adhesives
- Manufacture of insulating electric wires
- Road works in cold conditions



Thermal protection

# TEMPTEC 332

Temperature above 150°C | Chemical environment


## LEGENDS

EN388

### MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

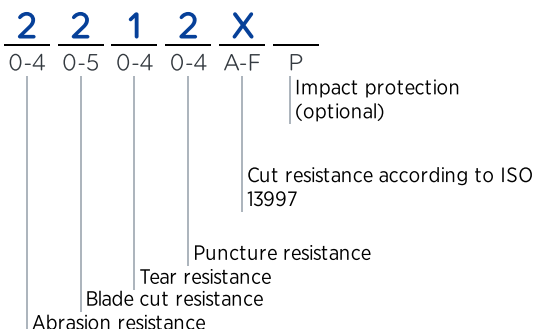


EN407

### THERMAL RISKS (HEAT AND FIRE)



PERFORMANCE LEVELS (X = NOT TESTED)

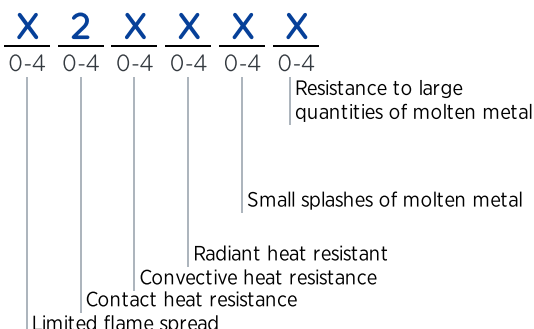


EN511 (Cold)

### COLD HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

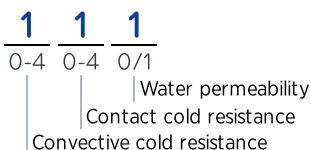

EN ISO 374-1

### CHEMICAL RISKS



TYPE A

A: Methanol  
C: Acetonitrile  
L: Sulphuric acid 96%  
M: Nitric acid 65%  
N: Acetic acid 99%  
S: Hydrofluoric acid 40%

## PRODUCT DETAILS

Interior finish	Knitted thermal protection
Exterior finish	Pebbled
Material	Polychloroprene
Colour.s	Black Blue
Length (cm)	36
Size	8 9 10
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	2.6E+11 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	1.6E+11 Ω

## LOGISTIC DETAILS

Packaging	1 pair/bag 6 pairs/carton
-----------	------------------------------

## LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/05/19/1646
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France

Edit 25/09/2022

MAPA SAS capital de 35.000.010 €  
420, rue d'Estienne d'Orves  
92705 Colombes Cedex France  
RCS Nanterre 314 307 720

mapa-pro.com

**MAPA**  
PROFESSIONAL