

SEEN SAFETY

2022 Product List

IRIS 860 SENSOR




IRIS 860 Sensor Pack contents: IRIS 860 sensor, 4m/13ft power cable, stainless steel mounting bracket, 4 x mounting screws. IP67. Class 1 eye-safe laser.

Packaging 13.6cm x 11cm x 17.4cm. Weight 1.12kg Part number: SI-120

SEEN INSIGHT

insight.seensafety.com

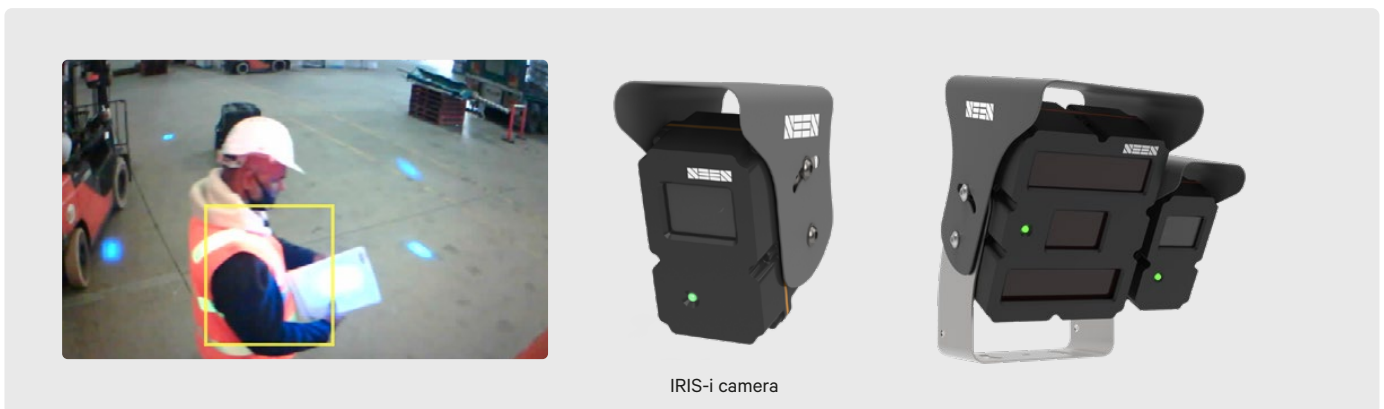

IRIS-i camera

IRIS-i Camera Pack	SI-220*
Monthly camera subscription	SI-221
Yearly camera subscription	SI-222

*Region specific modem: SI-220-APAC, SI-220-NA, SI-220-EU

IRIS-i Camera Pack contains IRIS-i camera, sensor-to-camera connection cable, stainless steel mounting bracket, mounting screws, weather shield, antenna. Plug-and-play attachment to an installed IRIS 860 sensor. IP67.

Packaging 15cm x 13cm x 7.5cm. Weight 0.73kg
Part number: SI-220*

IRIS 860 SENSOR ACCESSORIES



WEATHER SHIELD

Powder-coated aluminium weather shield for rain / heat / UV protection. Recommended for outdoor applications.

Weight 0.12kg
Part number: SI-115



CAB BOX

Pack contents: Cab Box, 2m/6.5ft power cable.
Not required for open cab forklift applications.
Gives an audible alert to the driver inside a closed cab machine.


Packaging 13.6cm x 11cm x 17.4cm. Weight 1.12kg
Part number: SI-113



CAB BOX SENSOR CABLE

Used to connect an IRIS 860 sensor to a Cab Box. One end of the cable is re-wireable to facilitate cable threading and shortening.


5m/16ft	SI-117	0.28kg
10m/33ft	SI-118	0.52kg
15m/50ft	SI-119	0.75kg

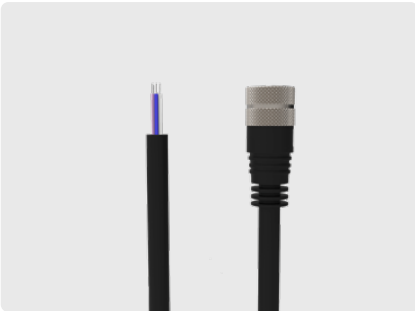

ACCESSORY CABLE

The accessory cable is used to connect a third-party accessory device to the sensor accessory port.

Length 2m/6.5ft. Weight 0.10kg
Part number: SI-121

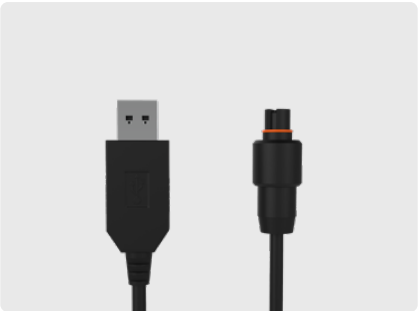

USB CONFIG CABLE

Used to connect an IRIS 860 sensor to a computer or Android device to allow the sensor settings to be changed.

Length 1.5m/5ft. Weight 0.10kg
Part number: SI-122



CABLE ADAPTER

To connect a USB Config Cable to a Cab Box Sensor Cable. (Allows sensor config from inside the cab if a Cab Box is used.)

Length 0.2m. Weight: 0.10kg
Part number: SI-124

DEALER DEMO CASE

Includes: plastic carry case, IRIS 860 sensor, mounting bracket, power cable, Cab Box, Weather Shield, Cab Box Sensor Cable (10m), Accessory Cable, USB Config Cable, magnetic feet.

Part number SI-127

Mounting bracket (replacement)	Part number: SI-125
Sensor power cable (replacement) (4m/13ft)	Part number: SI-126
Cab Box power cable (replacement) (4m/13ft)	Part number: SI-129

IMPORTANT. SEEN IRIS 860 sensors can provide collision warning assistance to the operator but do not replace the need for proper operator training and best practice safe operating procedure. While IRIS 860 sensors can alert the machine operator to a potential collision, the operator is always fully responsible for the safe operation of the equipment. IRIS 860 sensors do not comply with the regulatory standards required for devices which are intended to directly control vehicle or machine safety functions. Using the sensor accessory port to control a vehicle or machine function is entirely at your own risk. Detection can never be guaranteed.