

Safety lanyards

AZ 002
galvanized steel
opening: 18 mm
weight: 220 g



AZ 003
aluminium
opening: 20 mm
weight: 160 g



AZ 004
aluminium
opening: 22 mm
weight: 180 g
twist lock



AZ 040
aluminium
opening: 23 mm
weight: 80 g



AZ 041T
aluminium
opening: 23 mm
weight: 100 g
twist lock



AZ 020
galvanized steel
opening: 23 mm
weight: 230 g



AZ 021T
galvanized steel
opening: 23 mm
weight: 250 g
twist lock



AZ 022
galvanized steel
opening: 50 mm
weight: 500 g




AZ 023
aluminium
opening: 60 mm
weight: 480 g



AZ 024
aluminium
opening: 100 mm
weight: 920 g



AZ 025
galvanized steel
opening: 80 mm
weight: 800 g

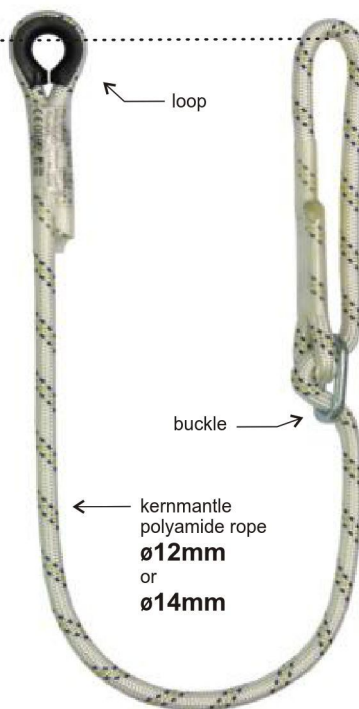

Can be used as:
- safety lanyard with energy absorber
- work positioning lanyard
Material: Polyamide

LB 100 universal adjustable safety lanyard ø12 mm

EN 354 EN 358



Ref.: LB 100 xx (xx - length)

Standards:
LB 100 10 - length 1,0m
LB 100 15 - length 1,5m
LB 100 20 - length 2,0m

OTHER LENGHTES
ON REQUEST



ROPE
ø12mm

LB 140 universal adjustable safety lanyard ø14 mm

EN 354 EN 358



Ref.: LB 140 xx (xx - length)

Standards:
LB 140 10 - length 1,0m
LB 140 15 - length 1,5m
LB 140 20 - length 2,0m

OTHER LENGHTES
ON REQUEST



ROPE
ø14mm