

Kimtech™ Purple Nitrile™ Xtra™ Gloves

deliver market-leading protection suitable for challenging life sciences and pharmaceutical manufacturing environments. The high quality nitrile material delivers seamless protection whenever and wherever it is needed. The synthetic nitrile polymer material (Acrylonitrile Butadiene) is designed for fit and reliability, with textured fingertips for improved grip and excellent water tightness (AQL 0.65) that results in a low risk of pinholes. The gloves are ambidextrous and incorporate a beaded cuff for added strength and ease of donning, so the wearer can simply grab and go without any fear


of ripping the material. Our nitrile safety gloves are anti-static tested to ensure no disruption to samples or equipment and are latex-, silicone- and powder-free.

Kimtech™ Purple Nitrile™ Xtra™ Gloves feature added length for extra protection and are designed to keep hands and wrists comfortable and protected while ensuring that research applications can be carried out contamination-free. The gloves are designated as PPE Cat III according to (EU) Regulation 2016/425, and are ideal for use in higher-risk applications, as well as being food contact approved.





Kimtech™ Purple Nitrile™ Xtra™ Gloves

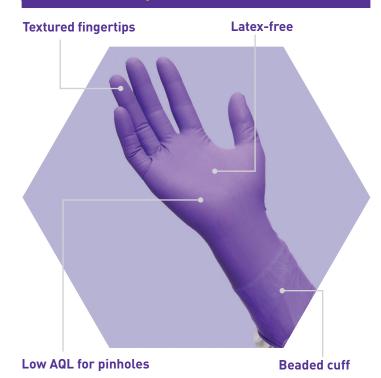

Size Guide

SIZE	CODE	LENGTH	QUANTITY 10x per case
XS	97610	30cm	50x per box = 500
S	97611	30cm	
М	97612	30cm	
L	97613	30cm	
XL	97614	30cm	

Key Features

- Industry-leading extra-length gloves offer unrivalled protection, cleanliness and quality
- ➤ Nitrile¹ construction results in products that are stronger and leaner than latex gloves, and feature better protection against a wider range of chemicals, including cytotoxic drugs
- **>** Gloves are anti-static tested to protect the wearer and equipment, and ambidextrous
- > Textured fingertips enhance grip and tactile sensitivity for safer and more efficient processes
- **>** Beaded cuffs add strength to the gloves, reducing the risk of tearing and increasing their durability, while also reducing roll down for easier donning and doffing
- > Contains no natural rubber latex, silicone or powder, reducing the risks of skin irritation for the wearer

Assured Compliance

- > PPE Cat III according to Regulation (EU) 2016/425
- > EN ISO 374-1:2016 Type B (JKT) Chemical Splash protection
- **>** EN 374-4:2014 Resistance to degradation by chemicals
- > EN ISO 374-5:2016 Micro Organism and VIRUS protection
- > Food contact approved

Quality Standards

- Manufactured in accordance with ISO 9001 and ISO 13485
- Manufactured in compliance with FDA CFR 21 part 820







Product Specifications

CHARACTERISTIC	VALUE					TEST METHODS		
- Freedom from holes	AQL 0.65 ²					EN 374-2:2014 and ASTM D 5151		
TENSILE PROPERTIES	TENSILE STRENGTH		ULTIMATE ELONGATION		NGATION			
- Before aging - After accelerated aging	21 MPa, nominal 21 MPa, nominal		550% nominal 500% nominal			ASTM D 412, ASTM D 573 and ASTM D 3578		
DIMENSION	DIMENSION NOMINAL THICKNESS/WIDTH							
Thickness (mm)	Middle fir	nger	Palm 0.14		Cuff 0.11		ASTM D 3767, ASTM D 6319 and EN 420:2003 + A1:2009	
Palm width (mm)	X-Small 70	Small 80	Medi		arge 10	X-Large 120	ASTM D 3767, ASTM D 6319 and EN 420:2003 + A1:2009	

Visit us at www.kimtech.eu or for any questions, email: kimtech.support@kcc.com

¹ Nitrile is a synthetic material exhibiting many of the properties of natural rubber latex while offering other distinct advantages: comfortable fit, resistance to puncturing and abrasion without compromising dexterity or electrostatic dissipative properties. ² AQL as defined per ISO 2859-1 for sampling by attributes.