Miller DuraHoist[™] Three-Piece Portable Base Options

Models: DH-4 (for maximum 29-in. offset), DH-24 (for maximum 48-in. offset)

Description

The Miller DuraHoist Three-Piece Portable Base options (DH-4 or DH-24) are constructed of lightweight powder-coated aluminum and feature adjustable screws and a built-in level indicator for easy set-upon uneven surfaces. Three lightweight components for easy transport and storage. No tools required.

Materials	
General Construction:	Welded Aluminum
Weld Certification:	AWS
Hardware:	Zinc Plated
Material Structure:	6061-T6, 5052-H32, 7075-T6 Aluminum, Mild Steel, Black Acetal, Black Vinyl
Finish:	Safety Yellow Powder Coat

Technical

Rated Capacity: Mast Moment	450lbs (204kg) working load limit @ minimum 4:1 Design Factor
Proof Load:	90,000 in-lbs
	(10,200 N.m)
Mast Rotation:	180°
Weights:	
<u>DH-4</u>	
Base Center	21lbs (9.5kg)
Base Legs (x2)	20lbs (9.1kg)
Total	61lbs (27.7kg)
<u>DH-24</u>	
Base Center Base Legs (x2) Total	39 lbs (17.7kg) 28 lbs (12.7kg) 95 lbs (43.1kg)




Application Restrictions

- 1. All winch and block mounting parts and hardware must be supplied or approved by Miller.
- 2. Retractable devices or shock absorbers must be installed and used in accordance with the manufacturer's instructions.
- **3.** To avoid instability or tipping, the Three-Piece Portable Base (<u>DH-4)</u> is to be used with 29-in. (737mm) *maximum* offset mast (One-Piece Adjustable Mast, DH-3; Two-Piece Adjustable Upper Mast, DH-21).
- 4. The Three-Piece Portable Base (<u>DH-24</u>) is to be used with 48-in. (1219mm) *maximum* offset mast (One-Piece Adjustable Mast (DH-3); Two-Piece Adjustable Upper Mast options, DH-21/DH-23).
- **5.** Where required by regulation, each installation must be approved to applicable standards by a qualified engineer.
- 6. All equipment must be set up and operated under the supervision of a competent person according to the manufacturer's instructions.

Miller DuraHoist[™] Three-Piece Portable Base Options

Models: DH-4 (for maximum 29-in. offset), DH-24 (for maximum 48-in. offset)

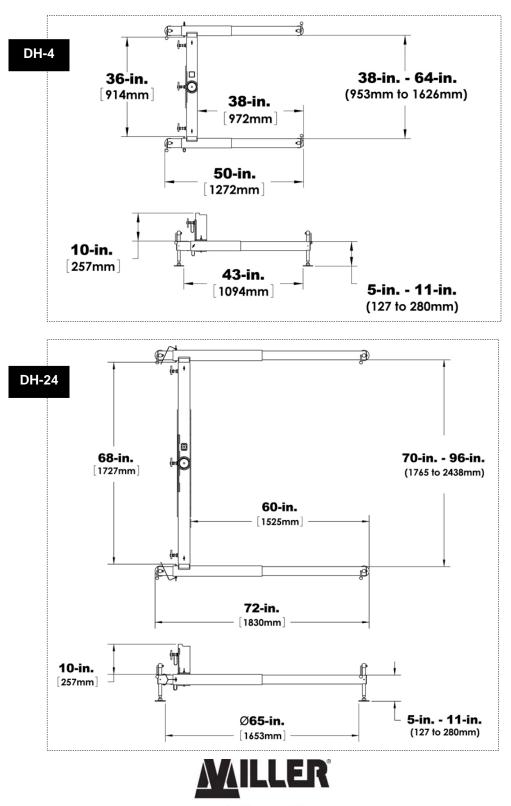

by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.