


Tuffite® Retractable Bonding/Grounding Wire Reel

DRM133 Reel Grounding End, Hand Clamp Bonding End

Self-retracting, locking reel with FM Approved clamp provides grounding for high-use areas.

- Spring-loaded retracting reel maintains a handy length of wire; prevents tangles to avoid accidents
- Reel is designed for smooth operation that promotes regular use—locks when cable is at desired length and retracts with a light tug
- Ideal for transferring flammable materials in high volumes
- Durable steel-encased reel helps protect wire from corrosion and damage
- Predrilled holes let you anchor reel to a grounded table, workstation or other sturdy surface (hardware not included)
- 3/32" uninsulated, corrosion-resistant steel cable provides solid grounding and easy inspection for fraying
- Hand clamp is FM Approved to meet high safety standards

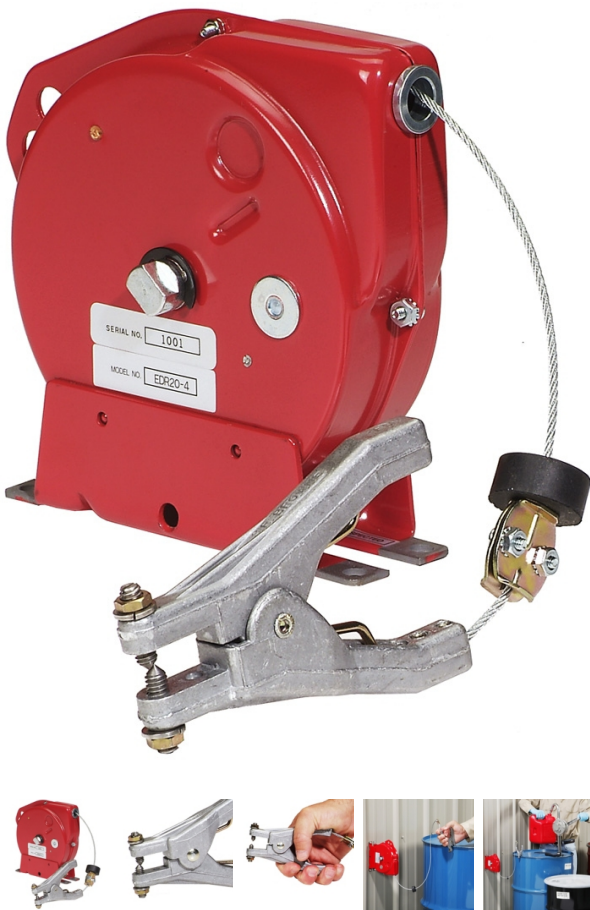

Item#	Description	Dimensions	Weight
DRM133-20T	20'	DRM133-20T-20' L DRM133-50T-50' L	DRM133-20T-5 lbs. DRM133-50T-7 lbs.
DRM133-50T	50'	DRM133-20T-20' L DRM133-50T-50' L	DRM133-20T-5 lbs. DRM133-50T-7 lbs.

Metric Equivalent:

Item#	Description	Dimensions	Weight
DRM133-20T	20'	DRM133-20T-6m L DRM133-50T-15m L	DRM133-20T-2.3 kg DRM133-50T-3.2 kg
DRM133-50T	50'	DRM133-20T-6m L DRM133-50T-15m L	DRM133-20T-2.3 kg DRM133-50T-3.2 kg

Specifications

Dimensions	DRM133-20T-20' L
Dimensions	DRM133-50T-50' L
Insulated	No

Meets NFPA Standards	Yes
Sold as	1 each
Weight	DRM133-20T-5 lbs.
Weight	DRM133-50T-7 lbs.
Composition	Clamp - Die-Cast Aluminum Wire - Steel Cable Housing - Steel
Bonding End	Hand Clamp
Grounding End	Reel
UNSPSC	39121613
Pigalog® Page Number	<u>Page 340</u>

Metric Equivalent

Dimensions	DRM133-20T-6m L
Dimensions	DRM133-50T-15m L
Weight	DRM133-20T-2.3 kg
Weight	DRM133-50T-3.2 kg

Technical Information

Certifications, Approvals and Ratings

FM Approved

Technical Documents

[29 CFR 1910.106\(e\)\(6\)\(ii\)](#)



One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com