


# Diamond Sof-Tred™ Anti-Fatigue Mat

FLM271 Not for Chemical Contact, Not for Oil/Grease Contact, 3' x 5' x 0.5"

Diamond plate-embossed mat features urethane top to seal out moisture and optional molded-in yellow border for extra visibility.

- Closed-cell PVC sponge mat is .5" thick to relieve leg and back fatigue
- Durable, abrasion-resistant Dyna-Shield urethane top coating seals out moisture and extends mat life
- Diamond-embossed surface provides traction and enables easy cleanup
- Beveled edges help reduce tripping hazard

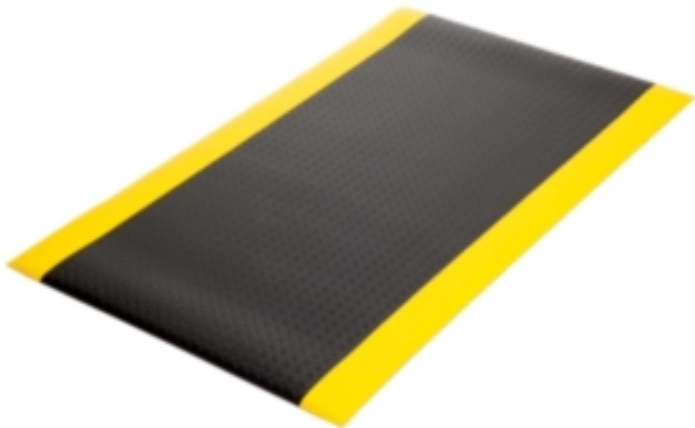

Item#	Description	Dimensions	Weight
FLM271-BWY	Black w/ Yellow Border,	3' W x 5' L x 0.5" H	18 lbs.
FLM271-BK	Black,	3' W x 5' L x 0.5" H	18 lbs.

## Metric Equivalent:

Item#	Description	Dimensions	Weight
FLM271-BWY	Black w/ Yellow Border,	91.4cm W x 152.4cm L x 12.7mm H	8.2 kg
FLM271-BK	Black,	91.4cm W x 152.4cm L x 12.7mm H	8.2 kg

## Specifications

Drainage Holes	Without Holes
Dimensions	3' W x 5' L x 0.5" H
Chemical Contact	Not for Chemical Contact
Oil/Grease Contact	Not for Oil/Grease Contact
Beveled Edge	Yes
Brand	No Trax
Grit Surface	No
Safe for Welding Areas	No
Sold as	1 each
Weight	18 lbs.

# per Pallet	48
Composition	Top Coat - Urethane Cushion - Closed-Cell PVC Sponge
Application	Dry Applications
Static Dissipative	No
UNSPSC	52101510
Pigalog® Page Number	<u>Page 230</u>

Metric Equivalent

Dimensions	91.4cm W x 152.4cm L x 12.7mm H
Weight	8.2 kg

Technical Information

Technical Documents

NoTrax® Floor Matting



**One Pork Avenue • Tipton, PA 16684-0304**  
1-855-493-4647 • Fax: 1-800-621-7447 • [newpig.com](http://newpig.com) • [hothogs@newpig.com](mailto:hothogs@newpig.com)