
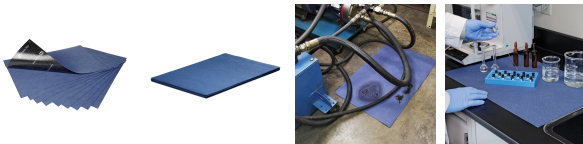


PIG® Grippy® Adhesive-Backed Absorbent Mat

MAT3200 Mediumweight, (10) 16" x 24" pads

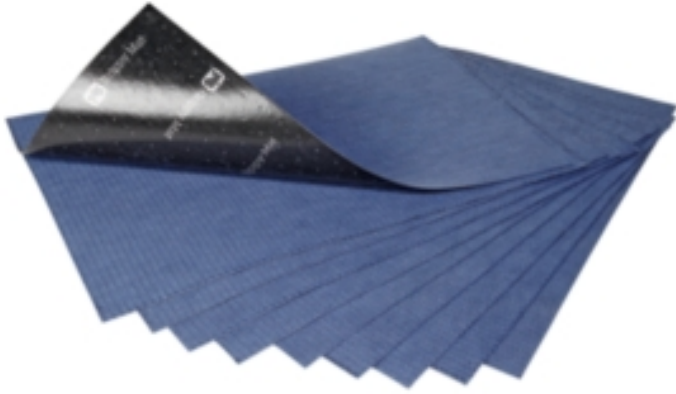

Make the switch to the mat that sticks to prevent slips, trips and falls around workstations and walkways near machinery in industrial facilities.

- Adhesive-backed absorbent mat stays exactly where you put it with no shifting, bunching up or flipping over to prevent slips, trips and falls in workstations and around machinery
- Proprietary adhesive sticks to the floor with a super-tight grip, but peels up easily for quick changeouts; reduces cleanup time to make your facility more productive
- Sticks to most commercial floor surfaces including concrete, VCT, linoleum, ceramic tile, quarry tile and laminate flooring
- Tough, spunbond top layer with heavy-duty zigzag stitching stands up to foot and light-wheeled traffic as well as heavy equipment driveovers; keep mat in service until it's saturated or shows signs of wear
- Eight layers of fine-fiber polypropylene safely absorb leaks, drips and overspray of oils, coolants, solvents and water
- Traps oil, grease and grime to keep them from being tracked around; ideal for oily areas near machines and equipment
- 16" x 24" mat pads are great for catching drips and lining workbenches, countertops and toolboxes
- Leakproof backing prevents absorbed liquid from soaking through to the floor
- Dark color hides grime so the mat looks cleaner longer
- Easy to cut and install: just roll it out, stick it down and smooth it out
- Tested and Certified by the National Floor Safety Institute (NFSI): when used as part of your floor safety program, high-traction surfaces such as PIG Grippy Absorbent Mat have been proven to reduce slip-and-fall claims by as much as 90%



Antimicrobial	No
Backing Material	Adhesive-Backed
Indoor/Outdoor	Indoor
Traffic Level	Heavy Foot Traffic; Drive-Over
Pad Quantity	(10) 16" x 24" pads
Fluid Absorbed	Oils, Coolants, Solvents, Water – Universal
Color	Blue
Dimensions	16" W x 24" L
Mat Weight	Mediumweight
Recycled Content	25% or more Recycled Content
Absorbency	Up to 1 gal. per box
Absorbency per	Up to 12.8 oz. per pad
Brand	PIG
Industry	Industrial Facilities; Shops & Garages
Perforated	No
Storage Temp Range	Store between 32°F and 120°F
Temperature Limit	Surface temps from 55°F to 120°F
Walking Surface	Absorbent Top
Sold as	10 pads per box
Weight	3.86 lbs.
New Pig Patent	Patent Pending
# per Pallet	128
Composition	Absorbent - Polypropylene Stitching - Polyester Adhesive Backing - Proprietary Adhesive Material
UNSPSC	47131901
UV Resistant	No
Pigalog® Page Number	<u>Page 21</u>

Metric Equivalent

Absorbency per	Up to 378.5 mL per pad
Absorbency	Up to 3.8 L per box
Dimensions	40.6cm W x 61cm L
Weight	1.8 kg

Technical Information

Certifications, Approvals and Ratings

NFSI Certified,ANSI B101.1- 2009,Meets NFPA 99 Static Decay and Resistivity Requirements

Technical Documents

PIG Grippy Mat

PIG® GRIPPY® ABSORBENT MAT PRODUCT DISCLAIMER & WARRANTY INFORMATION

Static Coefficient Of Friction (SCOF) Testing

How to use PIG Grippy Absorbent Mat

Case Study - General Cable

White paper – Slip & Fall Prevention Secrets

PIG® Grippy® Absorbents

29 CFR 1910.22(a)(2)



New Pig

World's best stuff for leaks, drips and spills.

One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com