
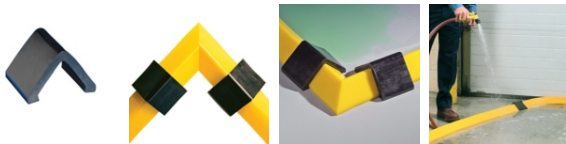


Dike Connector

PLR205 For Original SpillBlocker Dike, 1 each

Connector creates a leakproof joint between two Original SpillBlocker Dikes.

- Add this handy connector piece to a pair of Original SpillBlocker Dikes for a liquid-proof seal
- Create any length to suit your application or environment
- Use with your straight sections or optional 90-degree corner piece (PLR206)

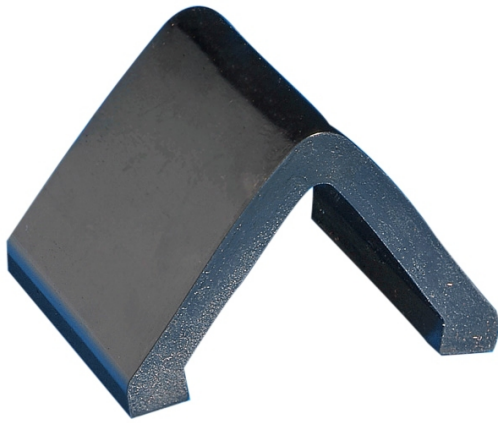

Specifications

Use With	Original SpillBlocker Dike
Color	Black
Dimensions	5.5" W x 4" L x 2.25" H
Max liquid temp exposure	Max Exposure Limit 225°F for up to 30 Minutes
Temperature Limit	Works from 0°F to 160°F
Sold as	1 each
Weight	1 lb.
Composition	Polyurethane
UNSPSC	24101907
Pigalog® Page Number	<u>Page 163</u>

Metric Equivalent

Dimensions	14cm W x 10.2cm L x 5.7cm H
Weight	.5 kg

Technical Information

Technical Documents

PIG SpillBlocker Dikes, DrainBlocker Drain Covers and other Blockers

Urethane Use, Care and Storage

PIG® Blocker Family

40 CFR 112.7

40 CFR 122.26

Disclaimers

Urethane Notice

Due to the nature of softer urethane, the physical properties of these products may change over time with exposure to certain environmental conditions like temperature, humidity, and UV radiation. Typical life expectancy is 5 years. Please inspect the stored product regularly to ensure it is in a usable state. For more details and for chemical compatibility, please call Technical Services.



New Pig

World's best stuff for leaks, drips and spills.

One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com