

5 foot flexible steel exhaust hose for directing CO away from blower intake

8" Centrifugal Blower - Gasoline

Model No.	Description
SVB-G8	127 cc Briggs & Stratton motor (Approx. 4 HP), 57 lbs.
SVB-G8-H	118 cc Honda motor (Approx. 4 HP), 57 lbs.


- 8" intake and exhaust
- Aluminum non-sparking blower wheel
- Polyethylene fan housing & safety guards
- Powder coated tubular steel frame, dual handles
- Meets EPA and CAL/OSHA emission standards
- 5 foot remote flexible steel exhaust hose with custom gas-tight muffler to prevent intake of CO exhaust



Model No.	Free Air	25' 1-90° Bend	25' 2-90° Bends
SVB-G8 High	3000 CFM	1725 CFM	1295 CFM
SVB-G8 Low	1500 CFM	1040 CFM	870 CFM



8" Centrifugal Blowers for Hazardous Locations

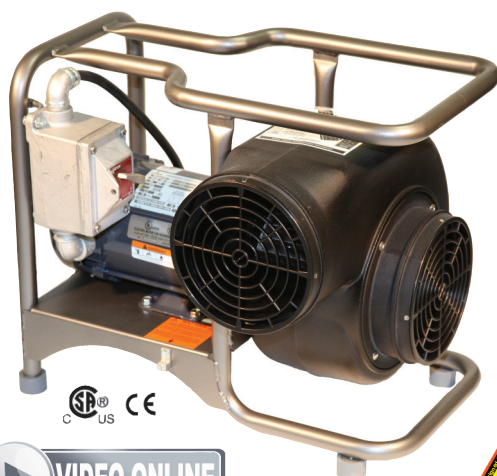

SVB-E8EXP Explosion-Proof Electric Blower

- 8" intake and exhaust
- Explosion-proof switch installed and wired with 25 foot cord, no plug, user wired per NEC requirements
- Conductive polyethylene fan housing & safety guards
- Aluminum non-sparking blower wheel
- Static grounding lug installed
- Powder coated tubular steel frame, dual handles
- Molded conductive safety guards



CSA C/US certified for Classes 1 and 2, Groups C, D, E, F, and G.

Plug not included - See page 63 for ordering information.

Model No.	Free Air	25' 1-90° Bend	25' 2-90° Bends
SVB-E8EXP	1570 CFM	1047 CFM	873 CFM
SVB-E8X250	1308 CFM	872 CFM	729 CFM



SVB-A8 Pneumatic (Air) Powered Blower - Intrinsically Safe

- 8" intake and exhaust
- Conductive polyethylene fan housing & safety guards
- Aluminum non-sparking blower wheel
- Static grounding lug installed
- Powder coated tubular steel frame, dual handles
- Ultra-quiet operation – under 80 dBA
- Adjustable flow output regulator
- In-line moisture separator/lubricator provided as standard
- Unique noise muffler and oil coalescing filter to prevent oil discharge



Model No.	Free Air	25' 1-90° Bend	25' 2-90° Bends
SVB-A8 High	3000 CFM	1725 CFM	1295 CFM
SVB-A8 Low	1500 CFM	1040 CFM	870 CFM

8" Centrifugal Blowers for Hazardous Locations

Model No.	Description
SVB-E8EXP	3/4 HP explosion-proof electric motor, 115VAC, 12.6 amp, 67 lbs.
SVB-E8X250	3/4 HP explosion-proof electric motor, 220VAC, 50 Hz, 70 lbs.
SVB-A8	4 HP pneumatic motor, operates from 10-100 psi, 48 lbs.

