

PIG Belly Patch

Instructions

The PIG Belly Patch works on any steel, fiberboard or plastic drum. The 5"x7"x1" polyurethane patch is large enough to cover most leaks and is reusable.


1. Remove protective film from patch and save for reuse. Position patch over leak.
2. Pull strap to tighten.
3. Quickly secure with ratchet.
4. Always wash patch before reuse or storage. Use warm water and a nonabrasive detergent or petroleum solvent cleaner.
5. Dry patch and reapply protective film before storage.
6. Store out of direct sunlight. Do not store in temperatures exceeding 120°F (49°C).

IMPORTANT NOTES:

- This product forms a tight seal with smooth surfaces
- Some chemicals will degrade this product. Refer to our online chemical resistance guide for information
- If this product is used in a spill response effort involving incompatible liquids, it should be disposed of with other spill response materials
- Do not store in high humidity, or where temperatures exceed 120° F
- The flexibility and sealing functions diminish at temperatures below -30°F

NOTE:

Due to the nature of softer urethane, the physical properties of these products may change over time with exposure to certain environmental conditions like temperature, humidity and UV radiation. Typical product life expectancy is 5 years. Please inspect the stored product regularly to ensure it is in a usable state. See newpig.com for chemical compatibility and urethane care guidelines.

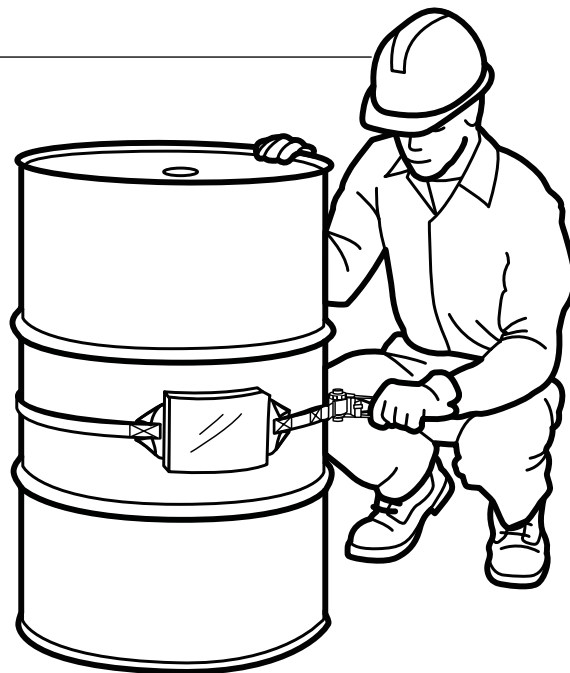

New Pig

One Pork Avenue
Tipton, PA 16684-0304

newpig.com

North America: **1-800-468-4647**

Europe: **+31 (0)76 596 92 50**

PIG, PIG logo are registered trademarks in USA and other countries. See tm.newpig.com

UK: **0800 919 900**

Outside North America: **+1-814-684-0101**