


Light


GUSTO S2

Fashionable safety shoe, designed for the food industry

Upper	Nappa Action Leather
Lining	Mesh
Footbed	SJ foam footbed
Midsole	N/A
Outsole	PU/PU
Toecap	Steel
Safety standard	S2 / SRC
Size range	EU 35-47 / UK 3.0-12.0 / US 3.0-13.0 JPN 21.5-31 / KOR 230-310
Sample weight	0.521 kg
Norms	EN ISO 20345:2011 ASTM F2413:2018

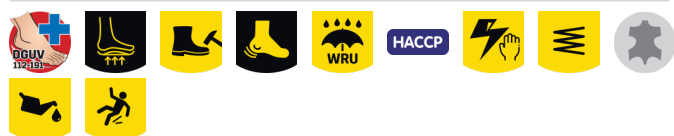

013



Oil & fuel resistant

The outsole is resistant against oil and fuel.



Water resistant Upper (WRU)

Prevents penetration of water if not permanently exposed to high levels.




Heel energy absorption

Heel energy absorption reduces the impact of jumps or running on the body of the wearer.



Steel toecap

Robust metal support to protect the feet of the wearer against falling or rolling objects.



Antistatic

Antistatic footwear prevents build-up of static electrical charges and ensures that they are discharged effectively. Volume resistance between 100 KiloOhm and 1 GigaOhm



SRC slip resistance

Slip resistant soles are one of the most important features of safety and occupational footwear. SRC slip resistant soles pass both SRA and SRB slip resistant tests, they are tested on both steel and ceramic surfaces.

Industries:

Catering, Cleaning, Construction, Food & beverages, Medical, Industry

Environments:

Dry environment, Wet environment

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	Nappa Action Leather			
	Upper: permeability to water vapor	mg/cm²/h	2.25	≥ 0.8
	Upper: water vapor coefficient	mg/cm²	25	≥ 15
Lining	Mesh			
	Lining: permeability to water vapor	mg/cm²/h	67.6	≥ 2
	Lining: water vapor coefficient	mg/cm²	541	≥ 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	25600/12800	25600/12800
Outsole	PU/PU			
	Outsole abrasion resistance (volume loss)	mm³	51.7	≤ 150
	Outsole slip resistance SRA: heel	friction	0.30	≥ 0.28
	Outsole slip resistance SRA: flat	friction	0.34	≥ 0.32
	Outsole slip resistance SRB: heel	friction	0.19	≥ 0.13
	Outsole slip resistance SRB: flat	friction	0.22	≥ 0.18
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction	N/A	≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction	N/A	≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction	N/A	≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction	N/A	≥ 0.22
	Antistatic value	MegaOhm	106	0.1 - 1000
	ESD value	MegaOhm	N/A	0.1 - 100
	Heel energy absorption	J	30	≥ 20
Toecap	Steel			
	Impact resistance toecap (clearance after impact 100J)	mm	N/A	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	N/A	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	14.0	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	16.0	≥ 14

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com