

EcoPolyBlend™ IBC Pallet and IBC Shed

Reliable spill protection and safe storage for IBCs

- Compliant storage for popular 275- or 330-gal (1000- or 1250-liter) IBCs.
- Compact footprint with ergonomic working height.

Constructed of durable 40% recycled polyethylene, these intermediate bulk container pallets offer excellent chemical resistance. Accepts IBCs up to 48-in W x 48-in D x 53-in H (1219-mm W x 1219-mm D x 1346-mm H). Large leakproof sump exceeds regulations and protects against high volume spills. Sturdy pillar supports accept up to 9,000-lb (4082-kg) uniformly distributed load. Removable pillars make for easy sump cleanup. Pallet features forklift pockets for relocation when empty. Ships fully assembled.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



Outdoor design features lockable, dual-access roll-top doors and includes reach pole for easy closure.



Independently green validated by UL Environment.



28674



28674



Description	Recycled Content	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
IBC indoor pallet	40%	372/1408	9000/4082	55 x 55 x 37.50 in 1397 x 1397 x 952 mm	E,S,0	28674	357/162
IBC outdoor shed w/pallet				60.75 x 68.50 x 103.75 in 1543 x 1740 x 2635 mm		28677	621/282
Replacement Reach Pole				1.125 dia x 60 in L 28 dia x 1524 mm L	—	28690	3/2

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

EcoPolyBlend™ Spill Trays


Lightweight and low-profile design for small-scale spill control

Made of 100% recycled polyethylene, these eco-friendly spill trays will not rust or corrode. Raised rib bottom adds rigidity and keeps contents out of spills—perfect for pouring and filling applications. Rated for service temperatures between -30° to 120°F (-34 to 49°C).

Sump Capacity Gallons/Liters	External Dim. W x D x H	Nominal Interior Dim W x D x H	Model No	Ship Wt lb/kg
12/45	46 x 16 x 5.50 in 1168 x 406 x 140 mm	40.375 x 10.375 x 4.875 in 1026 x 264 x 124 mm	28715	4/2
20/75	38 x 26 x 5.50 in 965 x 660 x 140 mm	32.375 x 20.375 x 4.875 in 822 x 518 x 124 mm	28716	5/2
	47.50 x 23 x 5.50 in 1207 x 584 x 140 mm	41.875 x 17.375 x 4.875 in 1064 x 441 x 124 mm	28717	6/3
23/87	37.75 x 34 x 5.50 in 959 x 864 x 140 mm	31.875 x 28.375 x 4.875 in 810 x 721 x 124 mm	28718	
29/109	47 x 33 x 5.50 in 1194 x 838 x 140 mm	41.375 x 27.375 x 4.875 in 1051 x 695 x 124 mm	28719	8/3



28718

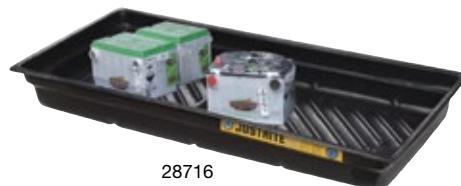

28716



28719

